
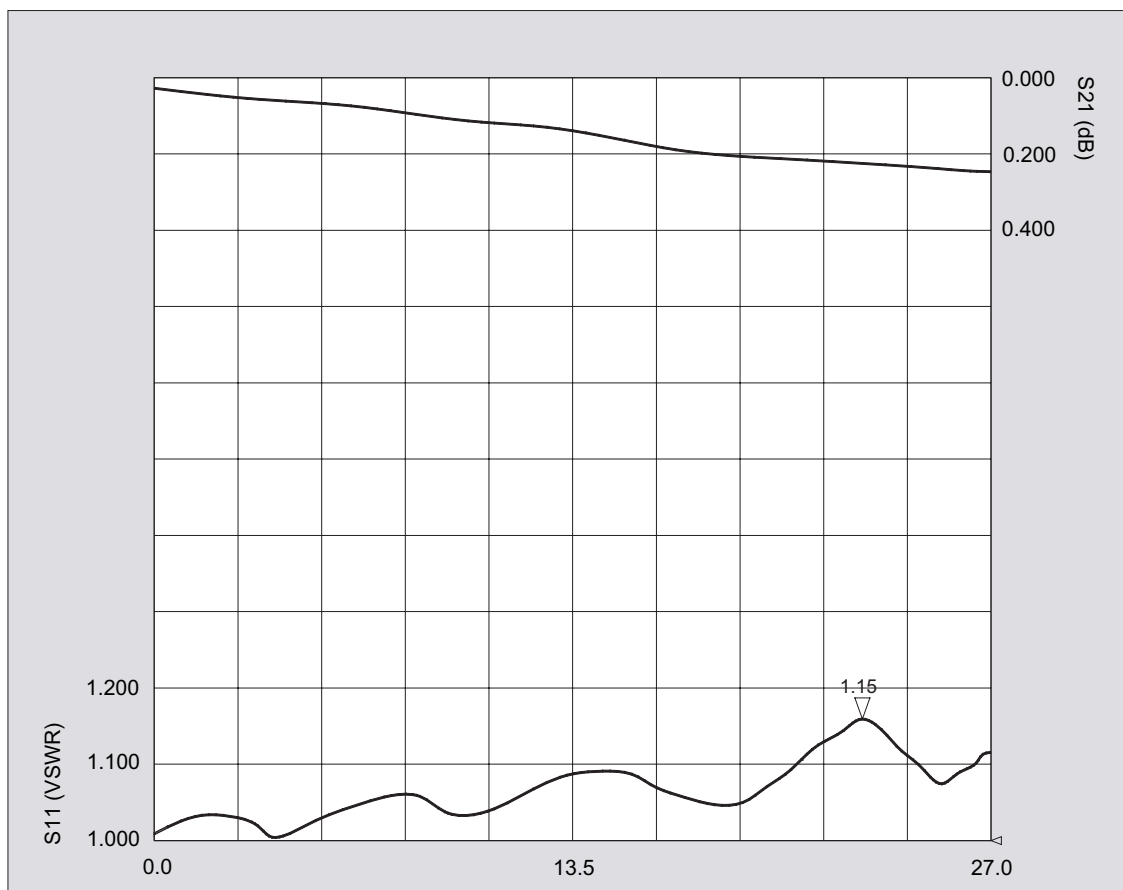


Typical Test Data for High Frequency SMA

Back-to-Back Connector Testing

SMA's are widely used in high performance military systems and test equipment where miniaturization is required. The standard SMA is rated to 18GHz, the new High Frequency SMA is rated 27GHz. The High Frequency SMA enhanced performance connector series also has a thick outer wall that increases the durability even with repeat matings making this an excellent choice for harsh environments.

Model No. 60-02-9F5-074B with .012" Test Pin

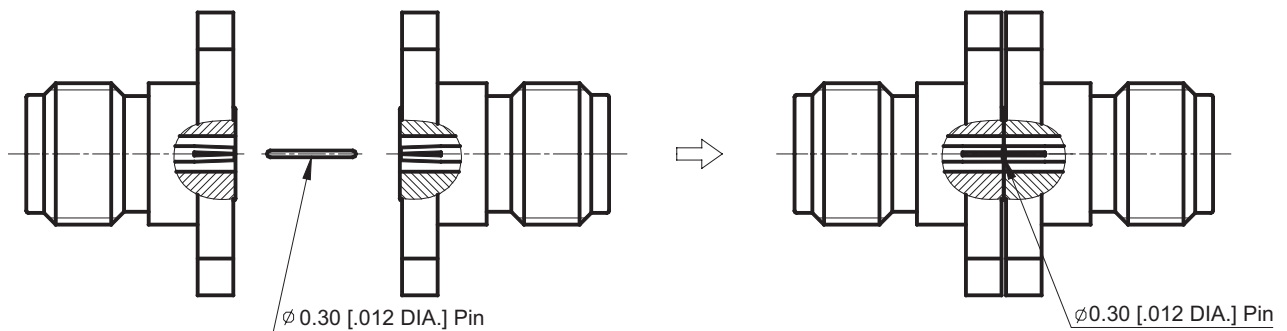

$\sqrt{1.15} = 1.07$ Maximum for each connector