

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~40 GHz
VSWR	1.15:1

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes


Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI

Interface Standards

2.92mm	MIL-STD-348A
--------	--------------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	07/07/2017	M. Dong

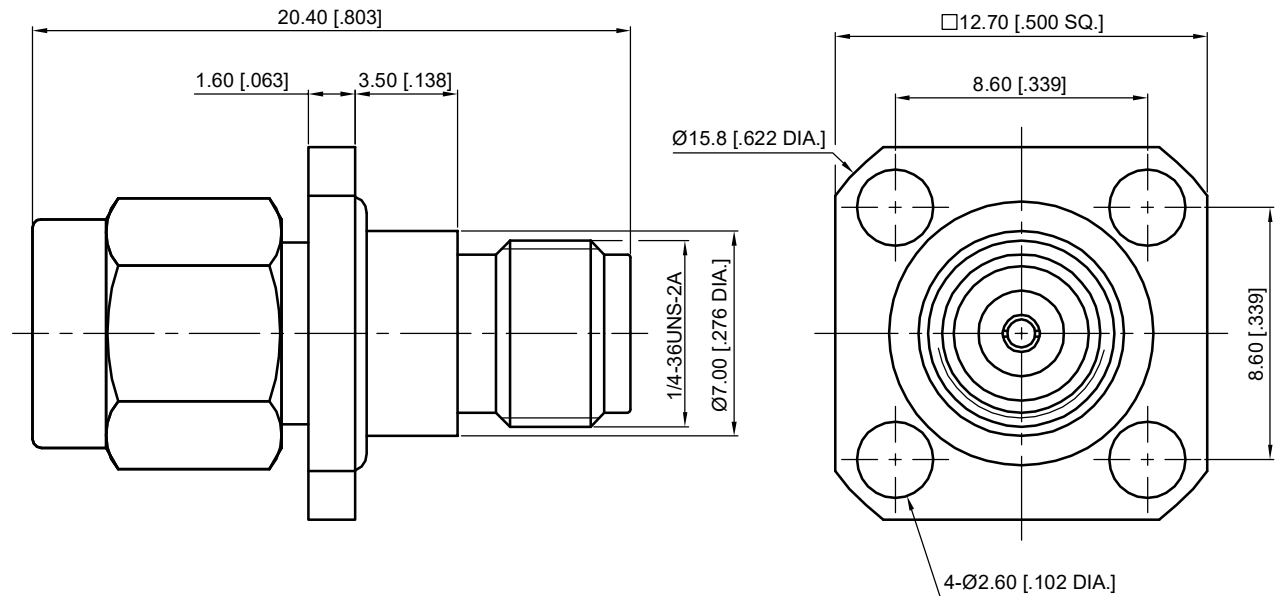

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS
ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL
TOLERANCES ARE:

.XX	±0.13 [0.005]
.X	±0.20 [0.008]
X	±0.50 [0.019]

ANGULAR TOLERANCES ARE: ALL = ±1°

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	07/07/2017
CHECKED:	J. Zhu	07/07/2017
APPROVED:	M. Dong	07/07/2017

TITLE:

Precision Adapter, 2.92mm
Male to 2.92mm Female,
4 Hole Flange

CMPPTER®

Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:

P-2.92M-2.92F-307

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------