

TECHNICAL DATA

Electrical

Impedance	50 "
Frequency range	0~6 GHz
VSWR	1.20:1
Average Power	2W

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 !C ~ +125 !C
RoHS Compliant	Yes


Material & Finish

Body	Brass, Tri Metel-plated
Pin Contact	Brass, Silver-plated
Radiator	Aluminium, Blackening
Gasket	Siliconne Rubber

Interface Standards

4.3-10	IEC61169-54
--------	-------------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	10/11/2019	

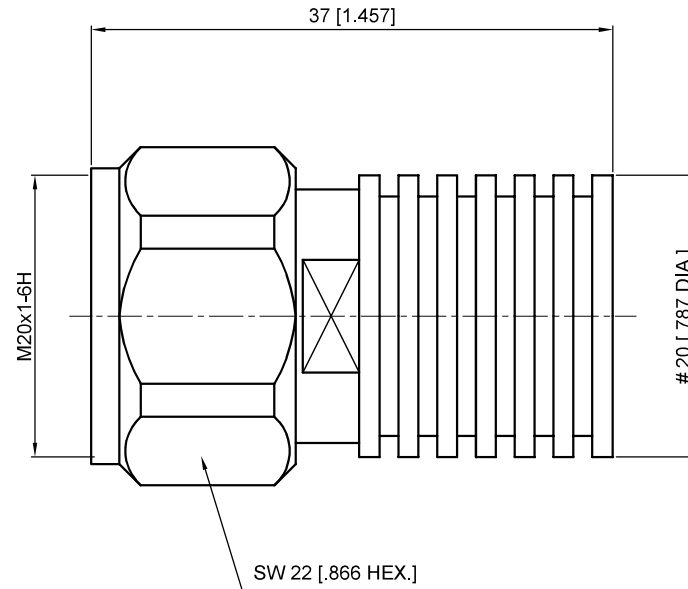

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	0.13 [.005"]
.X	0.20 [.008"]
X	0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL= 1°

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:		10/11/2019
CHECKED:		10/11/2019
APPROVED:		10/11/2019

TITLE:

4.3/10 Male Termination, 2W,
6GHz



PART No.:

T-4.310M-059

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------