


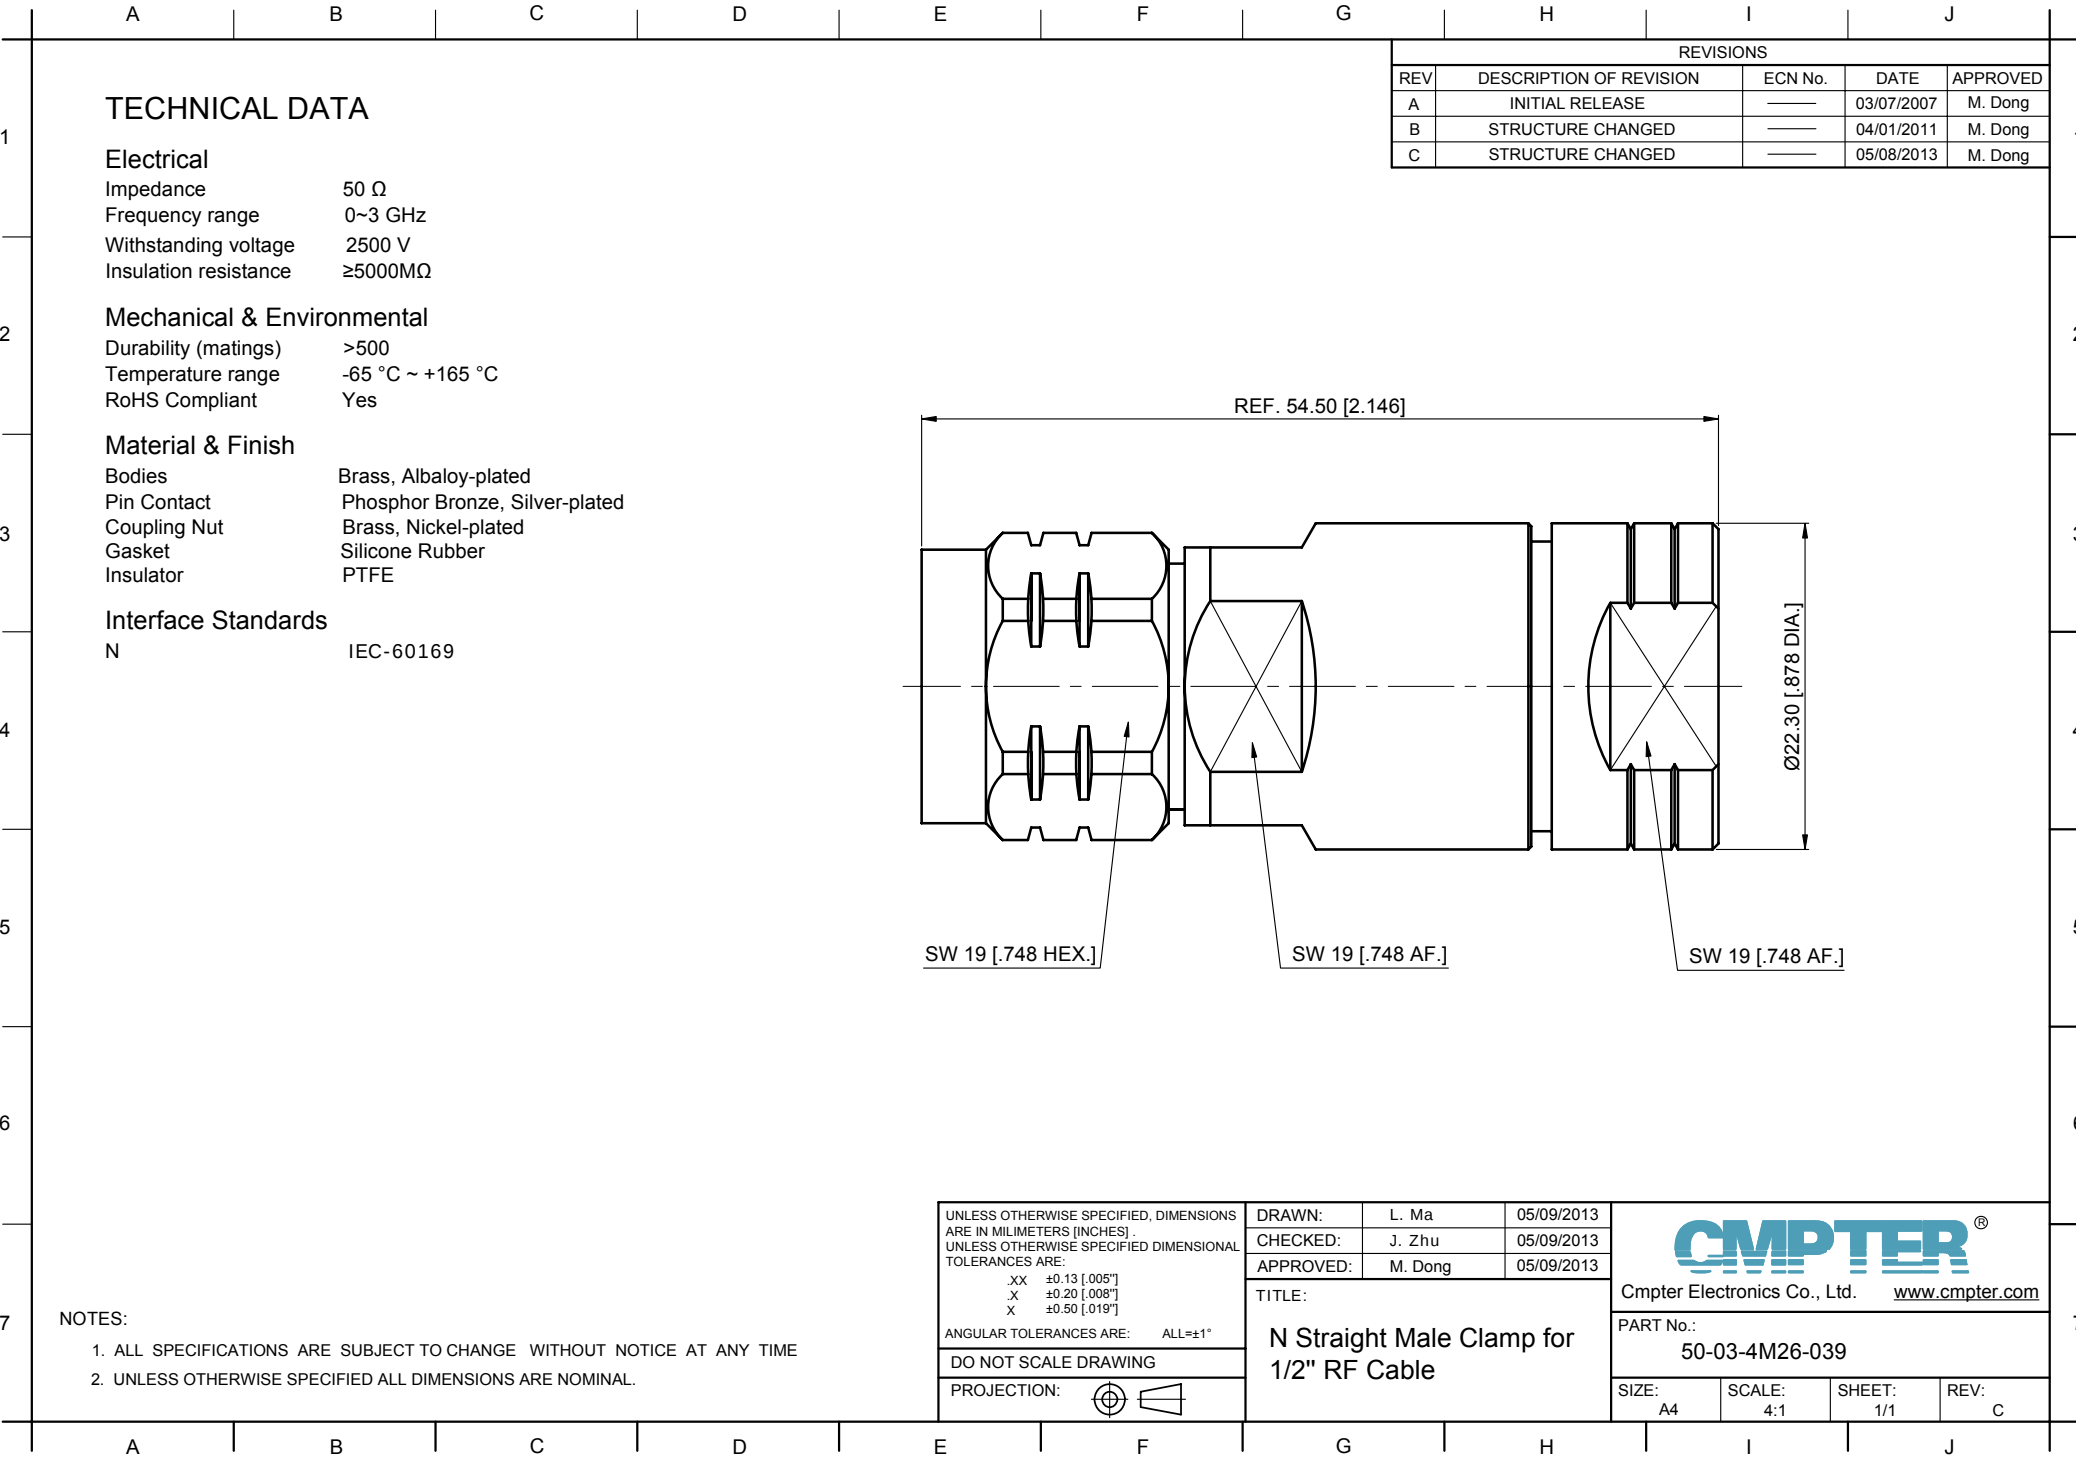

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~3 GHz
Withstanding voltage	2500 V
Insulation resistance	≥5000MΩ

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-65 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Bodies	Brass, Albaloy-plated
Pin Contact	Phosphor Bronze, Silver-plated
Coupling Nut	Brass, Nickel-plated
Gasket	Silicone Rubber
Insulator	PTFE

Interface Standards

N	IEC-60169
---	-----------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	03/07/2007	M. Dong
B	STRUCTURE CHANGED	—	04/01/2011	M. Dong
C	STRUCTURE CHANGED	—	05/08/2013	M. Dong

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES] UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL=±1° DO NOT SCALE DRAWING PROJECTION: 	
--	--

DRAWN:	L. Ma	05/09/2013
CHECKED:	J. Zhu	05/09/2013
APPROVED:	M. Dong	05/09/2013

TITLE:
N Straight Male Clamp for
1/2" RF Cable

 Cmpter Electronics Co., Ltd. www.cmpter.com			
PART No.: 50-03-4M26-039			
SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: C

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.