

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
A	INITIAL RELEASE	—	L. Ma	03/14/09	M. Dong

TECHNICAL DATA

■ Electrical data



Impedance	50 Ω
Frequency range	0~6 GHz
Insulation resistance	$\geq 5 \times 10^3$ M Ω
Withstanding voltage	1000 V

■ Mechanical data

Temperature range	-65 °C ~ +165 °C
Durability (matings)	>500

■ Material data


Body	Brass,Gold-plated
Pin Contact	Brass,Gold-plated
Insulator	PTFE

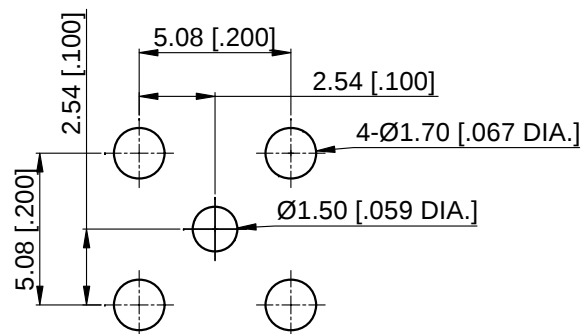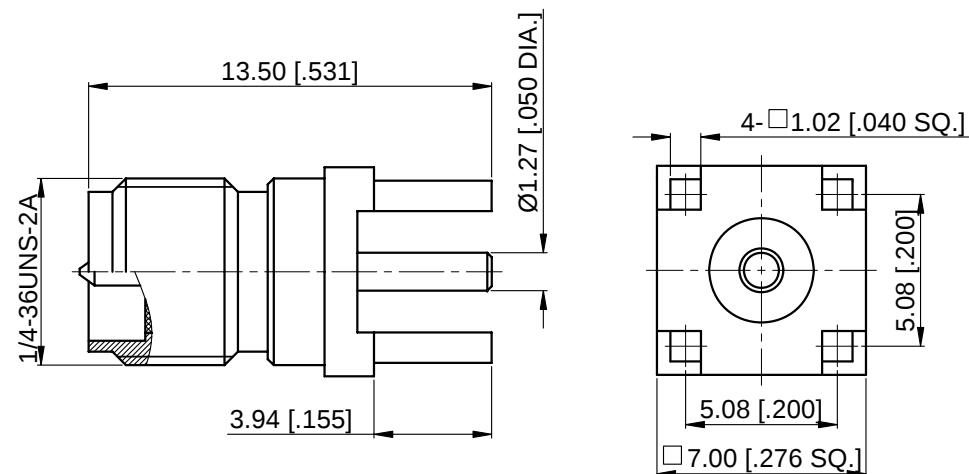

Recommended Mounting Hole

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 03/14/09	TITLE: RP SMA Straight PCB Jack	 www.cmppter.com			
ENGINEER: J. Zhu 03/14/09					
APPROVED: M. Dong 03/14/09					
TOLERANCE UNLESS OTHERWISE SPECIFIED	PART No.: 61-02-5L2-014	 DIMENSIONS IN MILLIMETERS (mm)			
X ± 0.50 [.019"] .X ± 0.20 [.008"] .XX ± 0.10 [.004"] ANGLES $\pm 1^\circ$	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A	