

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
A	INITIAL RELEASE	—	L. Ma	08/15/10	M. Dong
B	Add Mounting Hole	—	L. Ma	08/18/10	M. Dong

TECHNICAL DATA

■ Electrical data

Impedance	50 Ω
Frequency range	0~65 GHz
VSWR	1.25:1

■ Mechanical data


Temperature range	-55 °C ~ +165 °C
Durability (matings)	>500

■ Material data

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI

■ Interface Standards


1.85mm	IEC-61169
--------	-----------

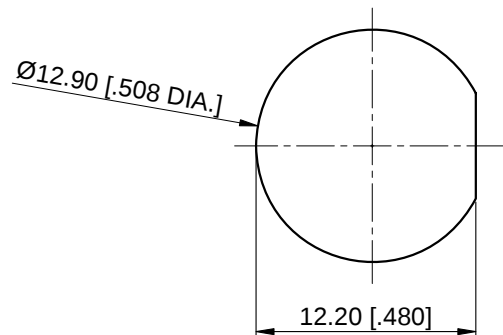


Recommended Mounting Hole

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

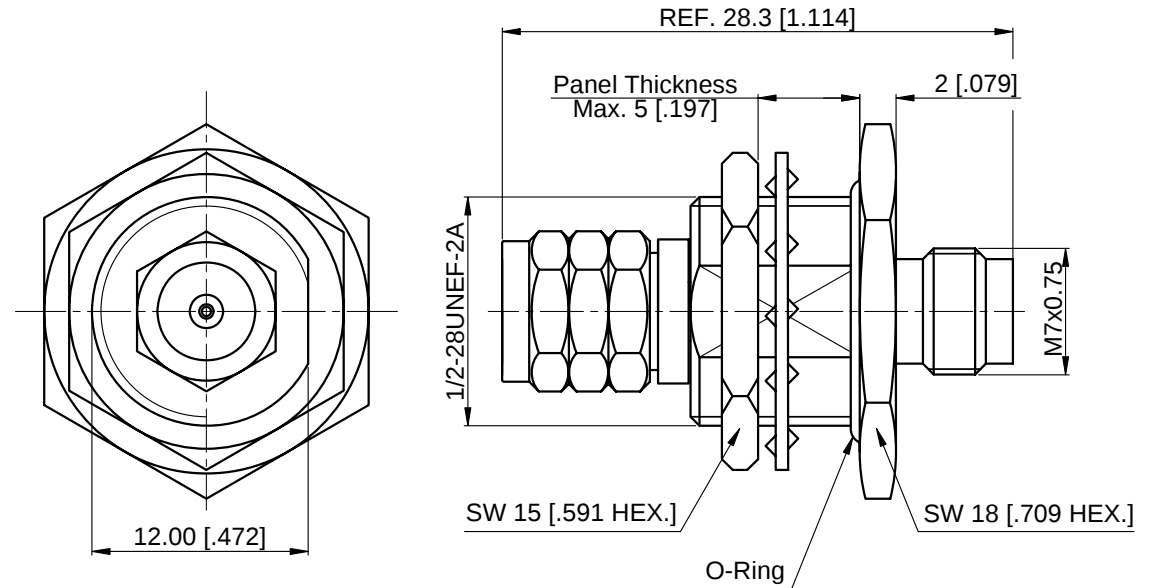

DRAWN: L. Ma 08/18/10	TITLE:	 www.cmpter.com			
ENGINEER: J. Zhu 08/18/10	Precision Adapter, 1.85mm Straight Waterproof Bulkhead Male to 1.85mm Female				
APPROVED: M. Dong 08/18/10		 DIMENSIONS IN MILLIMETERS (mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED	PART No.: P-1.85M-1.85F-223	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: B
X ±0.50 [.019"] .X ±0.20 [.008"] .XX ±0.10 [.004"] ANGLES ±1°					