

TECHNICAL DATA

Electrical

Impedance 50 Ω
Frequency range 0~67 GHz
VSWR 1.25:1


Mechanical & Environmental

Durability (matings) >500
Temperature range -55 °C ~ +80 °C
RoHS Compliant Yes

Material & Finish

Body Stainless Steel (SU303), Passivated
Pin Contact Beryllium Copper Alloy,Gold-plated
Insulator PEI

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE		09/26/2019	M. Dong

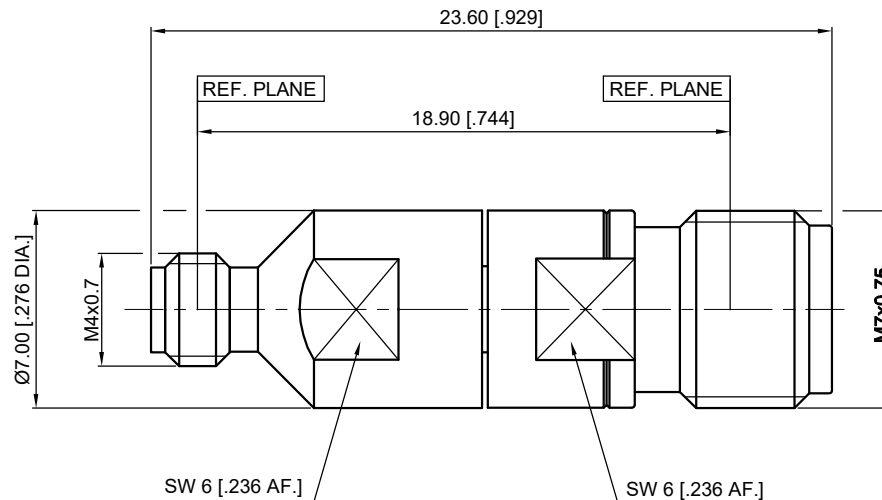

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:	
.XX	±0.13 [0.005"]
X	±0.20 [0.008"]
X	±0.50 [0.019"]
ANGULAR TOLERANCES ARE: ALL= ±1°	
DO NOT SCALE DRAWING	
PROJECTION:	

DRAWN:	L. Ma	09/26/2019
CHECKED:	K. Liu	09/26/2019
APPROVED:	M. Dong	09/26/2019

TITLE:
Precision Adapter, 1.0mm
Female to 1.85mm Female



Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:
P-1.0F-1.85F-376

SIZE:	SCALE:	SHEET:	REV:
A4	4:1	1/1	A