

TECHNICAL DATA

Electrical

Impedance 50 Ω
 Frequency range 0~67 GHz
 VSWR 1.25:1


Mechanical & Environmental

Durability (matings) >500
 Temperature range -55 °C ~ +80 °C
 RoHS Compliant Yes

Material & Finish

Body Stainless Steel (SU303), Passivated
 Pin Contact Beryllium Copper Alloy, Gold-plated
 Insulator PEI

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	09/26/2019	M. Dong

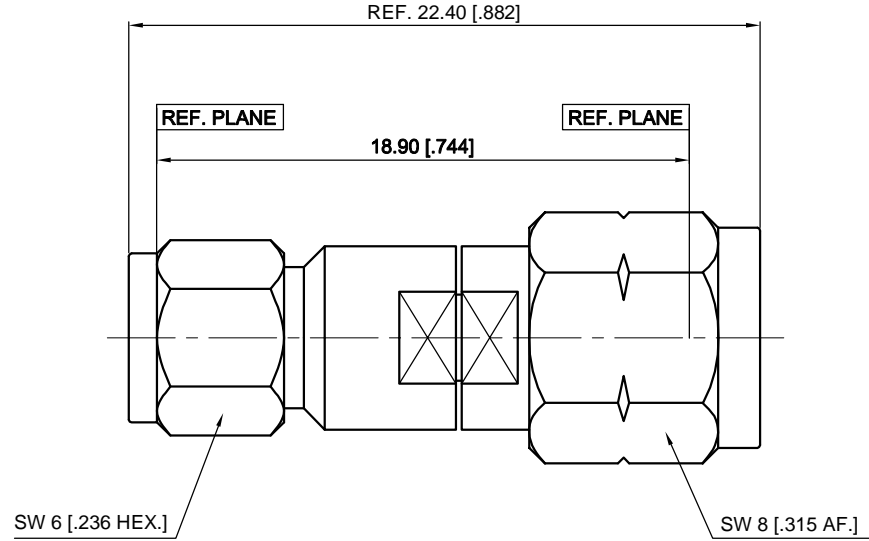

1
2
3
4
5
6
7

1
2
3
4
5
6
7

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL= ±1° DO NOT SCALE DRAWING PROJECTION:

DRAWN:	L. Ma	09/26/2019
CHECKED:	K. Liu	09/26/2019
APPROVED:	M. Dong	09/26/2019

TITLE:
Precision Adapter, 1.0mm Male to 1.85mm Male

CMP TER®
 Cmpter Electronics Co., Ltd. www.cmpter.com

PART No.:
P-1.0M-1.85M-379

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
----------	------------	------------	--------