

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~110 GHz
VSWR	1.30:1


Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +80 °C
RoHS Compliant	Yes

Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	CPS

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	05/16/2019	M. Dong

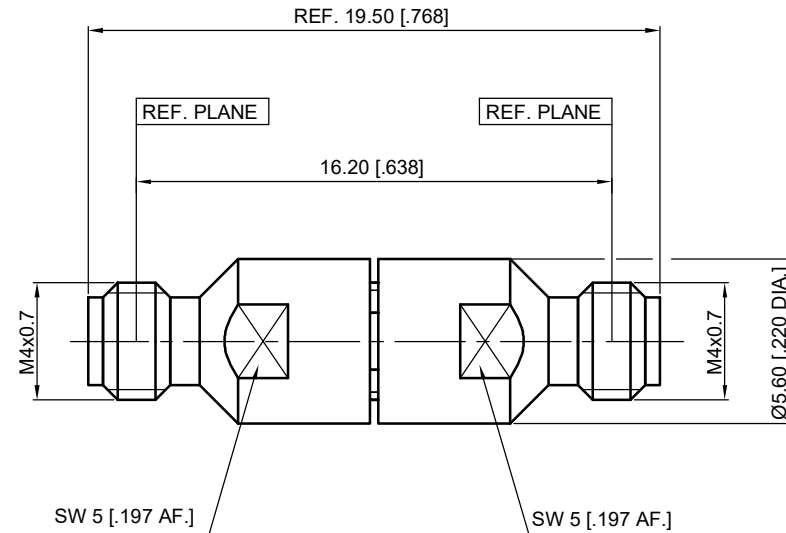

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES).
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL= ±1°

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	W. Shen	05/16/2019
CHECKED:	K. Liu	05/16/2019
APPROVED:	M. Dong	05/16/2019

TITLE:

Precision Adapter, 1.0mm
Female to 1.0mm Female

CMPPTER®

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:

P-1.0F-1.0F-368

SIZE:	SCALE:	SHEET:	REV:
A4	4:1	1/1	A

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.