

TECHNICAL DATA

Electrical


Impedance	50 Ω
Frequency range	0~110 GHz
VSWR	1.30:1

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +80 °C
RoHS Compliant	Yes

Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	CPS

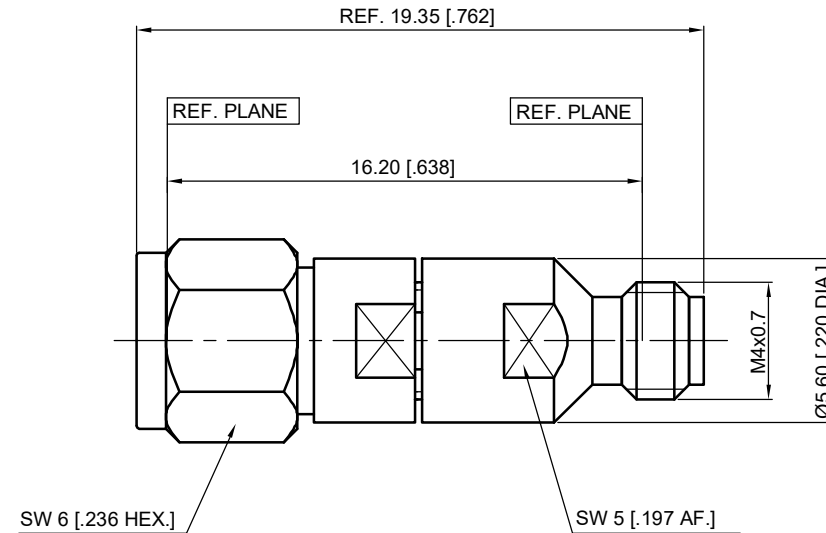

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES). UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ± 0.13 [.005"] .X ± 0.20 [.008"] X ± 0.50 [.019"] ANGULAR TOLERANCES ARE: ALL= $\pm 1^\circ$	
DO NOT SCALE DRAWING	
PROJECTION:	

DRAWN:	W. Shen	05/16/2019
CHECKED:	K. Liu	05/16/2019
APPROVED:	M. Dong	05/16/2019

TITLE:
**Precision Adapter, 1.0mm
Male to 1.0mm Female**

 Cmptter Electronics Co., Ltd. www.cmptter.com			
PART No.: P-1.0M-1.0F-367			
SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.