


TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -20~+80 °C
3. Durability: 500 Cycles
4. Withstanding voltage: 335 Vrms
5. Frequency range: 0~3 GHz
6. Cable assembly to be 100% tested for continuity

7. MATERIALS AND FINISHES
 MMCX Right Angle Male Connector:
 Body - Brass plated Gold
 Center contact - Brass plated Gold
 Insulator - PTFE

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	05/14/2014	M. Dong

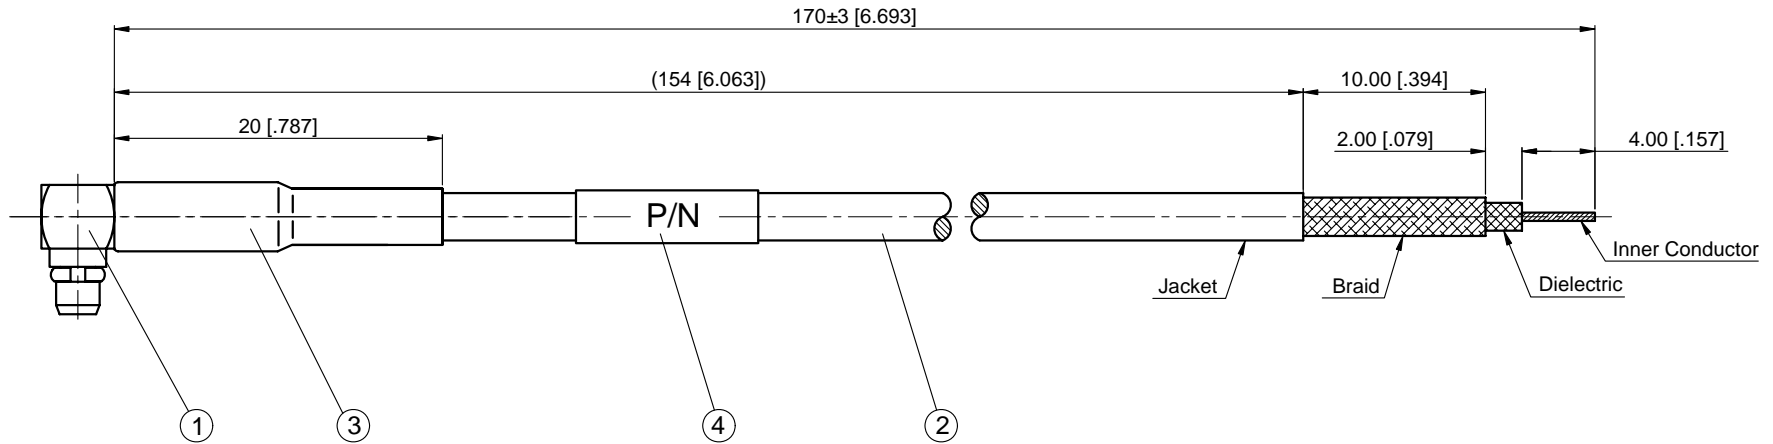

4		Customer Label	1
3	HST-4-BK	4mm Diameter Heat Shrink Tube	1
2	RG174	Flexible RG174 Coax Cable Single shielded with Black PVC Jacket	1
1	31-13-1M04-011	MMCX Right Angle Male Crimp for RG174/RG316/LMR100 Cable	1
S/N	Part No.	Description	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [.005"]
 .X ±0.20 [.008"]
 X ±0.50 [.019"]
 ANGULAR TOLERANCES ARE: ALL±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN: L. Ma 05/14/2014
 CHECKED: J. Zhu 05/14/2014
 APPROVED: M. Dong 05/14/2014
 TITLE:
 Cable Assembly, MMCX Right Angle Male to None, RG174 Cable, 170mm

CMP TER[®]
 Cmpter Electronics Co., Ltd. www.cmpter.com
 PART No.:
CA174-MMCXRAM-NONE-170mm-617
 SIZE: A4 SCALE: 2.5:1 SHEET: 1/1 REV: A

- NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.