

TECHNICAL DATA

Electrical

Impedance 50 Ω
Frequency range 0~50 GHz
VSWR 1.30:1
Contact resistance
-centre contact ≤3mΩ
-outer contact ≤2mΩ
Insulation resistance ≥3000MΩ

Mechanical & Environmental

Durability (matings) >500
Temperature range -55 °C ~ +165 °C
RoHS Compliant Yes


Material & Finish

Body Stainless Steel (SU303), Passivated
Pin Contact Beryllium Copper Alloy,Gold-plated
Insulator PEI

Interface Standards

2.4mm IEC-61169

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	11/24/2019	M. Dong

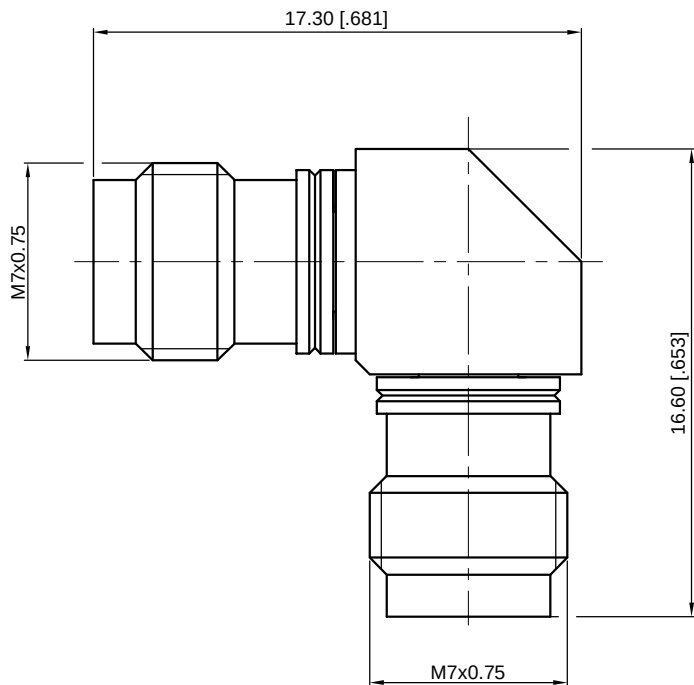

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL= ±1°	
DO NOT SCALE DRAWING	
PROJECTION:	

DRAWN:	L. Ma	11/24/2019
CHECKED:	J. Zhu	11/24/2019
APPROVED:	M. Dong	11/24/2019

TITLE:
Precision Adapter, Right Angle,
2.4mm Female to 2.4mm Female



Cmpter Electronics Co., Ltd. www.cmpter.com

PART No.:
PR-2.4F-2.4F-387

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------