



1. Impedance: 50 Ω
2. Temp. range: -40~+90 $^{\circ}\text{C}$
3. Withstanding voltage: 250 V
4. Frequency range: 3 GHz
5. Durability: 30 cycles (U.FL Connector)
500 Cycles (N Connector)
6. IP Rating: IP67 (N Connector after mated)
7. Cable assembly to be 100% tested for continuity

N Straight Waterproof Bulkhead Female Connector:
 Body - Brass plated Nickel
 Fastening Nut - Brass plated Nickel
 Center contact - Phosphor Bronze plated Gold
 Insulator - PTFE
 O-Ring - Silicone Rubber

U.FL/MHF Plug
Enlarged Drawing

6:1

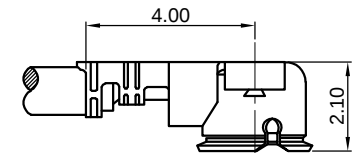

ANGULAR TOLERANCES ARE: ALL
OVERALL CABLE LENGTH TOLERANCE

DO NOT SCALE DRAWING

TITLE:
Cable Assembly, N Straight
Waterproof Bulkhead Female to
U.FL Right Angle Plug, MIC1.32
Cable, 9cm



SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.