


REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	07/23/2019	M. Dong

TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -40~+150 °C
3. Durability: 500 Cycles
4. Withstanding Voltage: 500V DC
5. Frequency range: 0~40 GHz
6. VSWR: 1.30:1
7. Cable assembly to be 100% tested on VNA

8. MATERIALS AND FINISHES
- 2.92mm Straight Male Connectors:
- Body - Stainless Steel, Passivated
 - Coupling Nut - Stainless Steel, Passivated
 - Center contact - Beryllium Copper Alloy, Gold-plated
 - Insulator - PEI

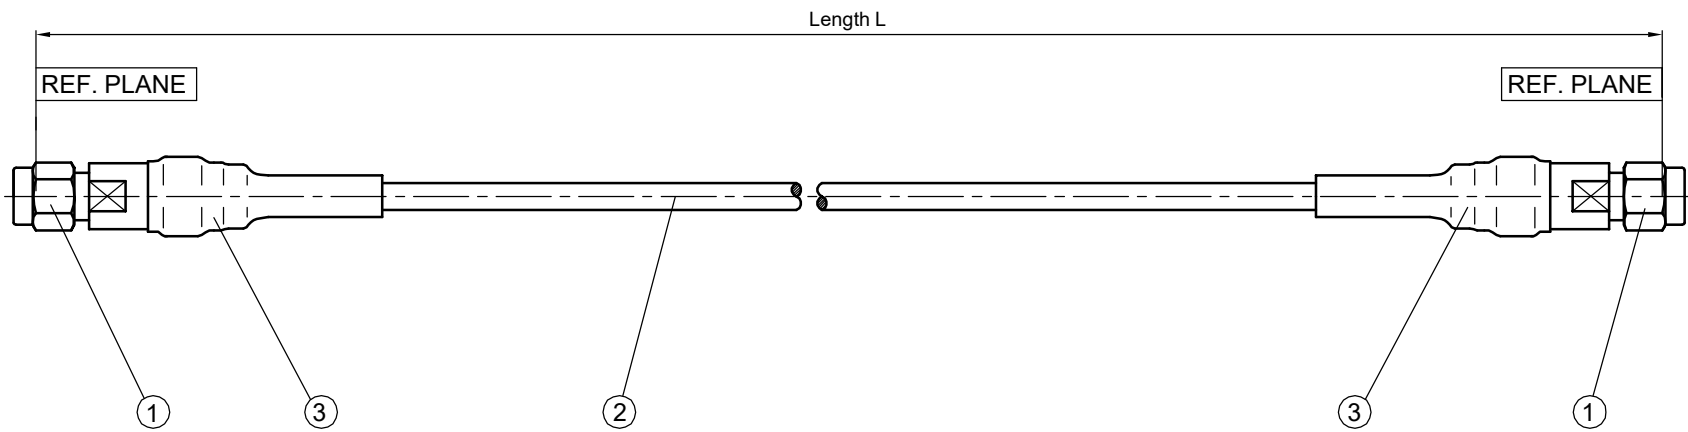

Part No.	Length L (m)	Insertion Loss (dB)
CA360TB-2.92M-2.92M-0.6M-2161	0.6±0.012	2.04 dB Max.
CA360TB-2.92M-2.92M-1.2M-2247	1.2±0.024	3.57 dB Max.
CA360TB-2.92M-2.92M-2.5M-2248	2.5±0.05	6.90 dB Max.

3		Dual Wall (Adhesive/glue) Heat-shrinkable Tube	2
2	CTFB-360	CTFB-360 Test Cable (3.60mm Diameter FEP Jacket)	1
1	96-03-2M67-047	2.92mm Straight Male Solder for CTFB-360 Cable	2
S/N	Part No.	Description	QTY

RoHS Compliant

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES).
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [0.005"]
 X ±0.20 [0.008"]
 X ±0.50 [0.019"]
 ANGULAR TOLERANCES ARE: ALL= ±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN:	L. Ma	07/23/2019
CHECKED:	J. Zhu	07/23/2019
APPROVED:	M. Dong	07/23/2019

TITLE:
 Cable Assembly, 2.92mm Straight Male to 2.92mm Straight Male, CTFB-360 Cable

CMPPTER[®]
 Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:
CA360TB-2.92M-2.92M-XXX-XXX- 7

SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A
----------	------------	------------	--------