


TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -55~+125 °C
3. Durability: 500 Cycles
4. Frequency range: 0~18 GHz
5. VSWR: ≤1.25

6. MATERIALS AND FINISHES
 N Straight Female Connector:
 Body - Stainless Steel (SU303), Passivated
 Center contact - Beryllium Copper Alloy plated Gold
 Insulator - PTFE & PEI

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	12/05/2013	M. Dong

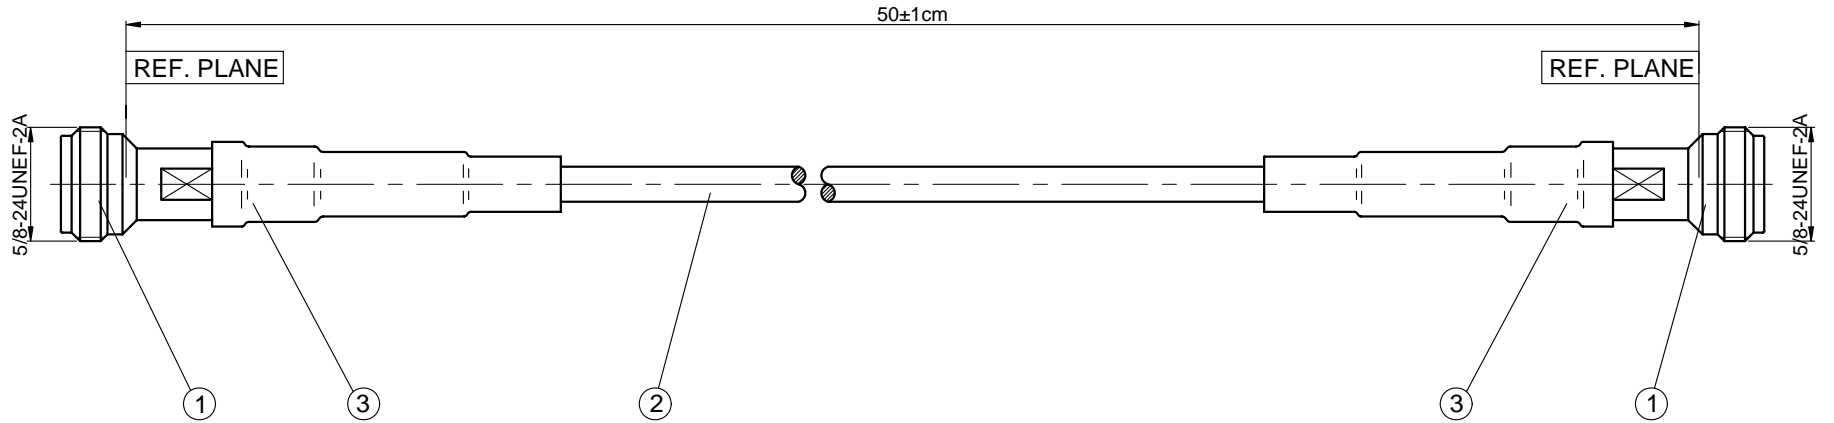

3		Dual Wall Heat-shrinkable Tube	2
2	CXN3449	Gore CXN3449 Cable	1
1	50-02-2M52-111	N Straight Female Solder for Gore CXN3449 Cable	2
S/N	Part No.	Description	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [0.005]
 X ±0.20 [0.008]
 X ±0.50 [0.019]
 ANGULAR TOLERANCES ARE: ALL=±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN: L. Ma 12/05/2013
 CHECKED: J. Zhu 12/05/2013
 APPROVED: M. Dong 12/05/2013

TITLE:
 Cable Assembly, N Straight Female to N Straight Female, Gore CXN3449 Cable, 50cm

CMP TER[®]
 Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.: CA3449-NF-NF-50cm-518

SIZE: A4 SCALE: 1:1 SHEET: 1/1 REV: A

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.