


2.4mm Test Cable Assembly

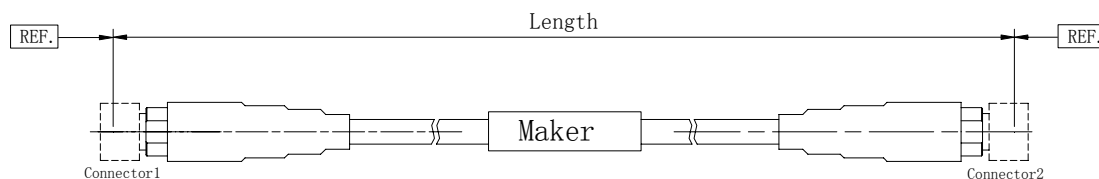

P/N.	CA3507-2.4F-2.4F-1M-396	
Assembly Instruction	Cable Assembly, 2.4mm Straight Female to 2.4mm Straight Female, GORE™ CXN3507 Cable, 1 meter	
Connector Data		
	Connector 1	Connector 2
Connector Type	2.4mm Female	2.4mm Female
Inner Contact	Beryllium Copper Alloy, Gold-Plated	Beryllium Copper Alloy, Gold-Plated
Insulator	PEI	PEI
Body	SU303F, Polishing & Passivated	SU303F, Polishing & Passivated
Cable Data		
Cable Type	GORE™ CXN3507	
Outer Conductor	3.6mm (0.140")	
Inner Conductor	0.9mm(0.036") Solid	
Min. Bend Radius(mm)	25.4mm	
Bend (Cycles)	1000	
Assembly Data		
Length (mm)	1000	
Impedance (ohms)	50	
Working Freq. (GHz)	DC~40	
VSWR (: 1 max) @GHz	40	1.30
Insertion loss (dB/m max) @GHz	1	0.47
	4	0.95
	6	1.17
	8	1.36
	10	1.54
	12	1.68
	18	2.09
	27	2.59
	35	2.98
	40	3.30
Environment Data		
Temp. (℃)	-55~125	