


TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -55~+125 °C
3. Durability: 500 Cycles
4. Frequency range: 0~40 GHz
5. VSWR: ≤1.25

6. MATERIALS AND FINISHES
- 2.4mm Straight Male Connector:
 Body - Stainless Steel (SU303), Passivated
 Coupling Nut - Stainless Steel (SU303), Passivated
 Center contact - Beryllium Copper Alloy plated Gold
 Insulator - PEI

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	12/05/2013	M. Dong

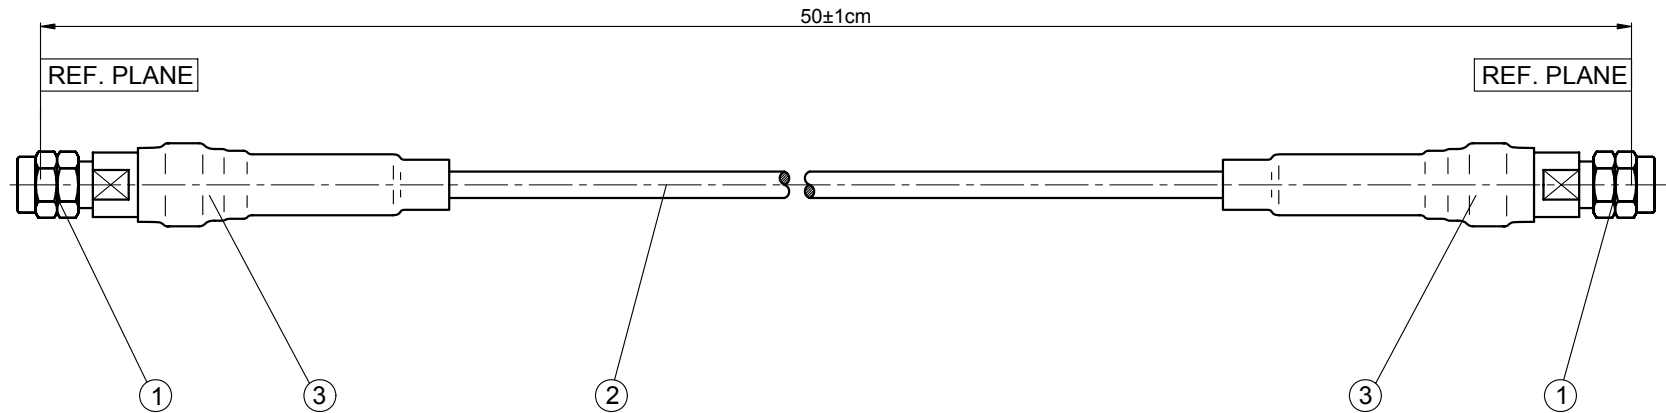

3		Dual Wall Heat-shrinkable Tube	2
2	CXN3507	Gore CXN3507 Cable	1
1	97-03-2M50-034	2.4mm Straight Male Solder for Gore CXN3507 Cable	2
S/N	Part No.	Description	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 XX ±0.13 [0.005"]
 X ±0.20 [0.008"]
 X ±0.50 [0.019"]
 ANGULAR TOLERANCES ARE: ALL=±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN: L. Ma 12/05/2013
 CHECKED: J. Zhu 12/05/2013
 APPROVED: M. Dong 12/05/2013

TITLE:
 Cable Assembly, 2.4mm Straight Male to 2.4mm Straight Male, Gore CXN3507 Cable, 50cm

CMP[®]
 Cmp[®]ter Electronics Co., Ltd. [www.cmp[®]ter.com](http://www.cmp[®]ter.com)

PART No.:
 CA3507-2.4M-2.4M-50cm-517

SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A
----------	------------	------------	--------

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.