


TECHNICAL DATA

- 1. Impedance: 50 Ω
- 2. Temp. range: -40~+80 °C
- 3. Withstanding voltage: 1000 Vrms
- 4. Frequency range: 0~3 GHz
- 5. Durability: 500 cycles
- 6. Cable assembly to be 100% tested for continuity

- 7. MATERIALS AND FINISHES**
 BNC Straight Male Connectors:
 Body & Coupling Nut - Brass plated Nickel
 Center Contact - Brass plated Gold
 Insulator - PTFE
 Gasket - Silicone Rubber

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	02/02/2016	M. Dong

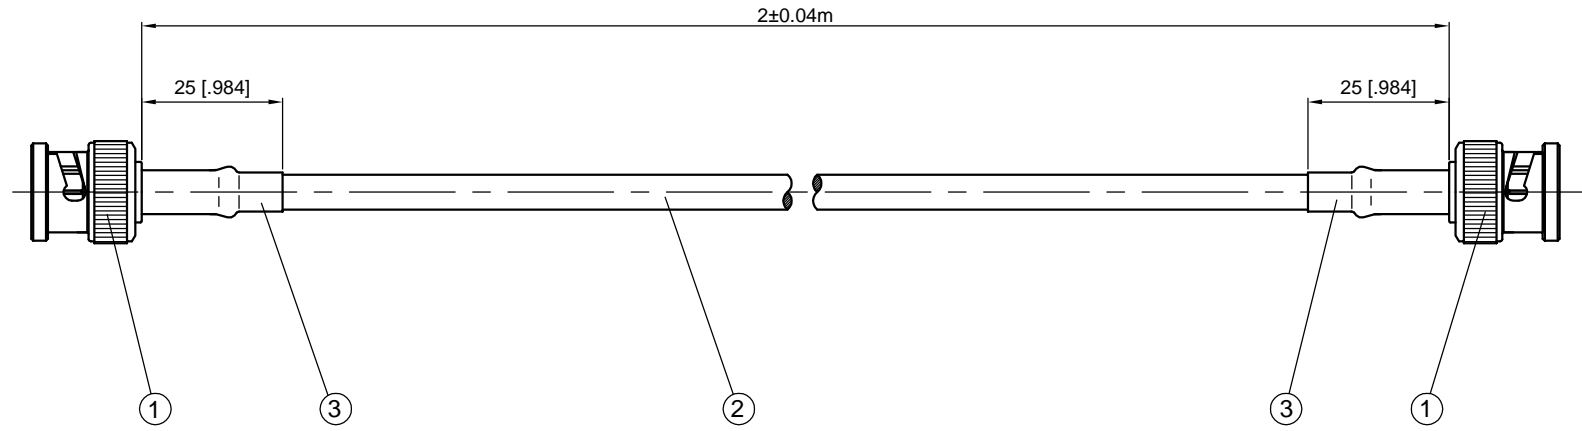

3	HST-7-BK	Diameter 7mm Heat-shrinkable Tube (Black)	2
2	LLC195	Low Loss Flexible 195 Cable Double Shielded with Black PVC Jacket	1
1	10-03-1M18-003	BNC Striaght Male Crimp for LMR195/RG58 Cable	2
S/N	Part No.	Description	QTY

RoHS Compliant

- NOTES:**
- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES).
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [.005]
 .X ±0.20 [.008]
 X ±0.50 [.019]
 ANGULAR TOLERANCES ARE: ALL±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN:	L. Ma	02/02/2016
CHECKED:	J. Zhu	02/02/2016
APPROVED:	M. Dong	02/02/2016

TITLE:
Cable Assembly, BNC Straight Male to BNC Straight Male, LLC195 Cable, 2 Meters

CMPPTER®
 Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:
CA195-BNCM-BNCM-2M-1085

SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A
----------	------------	------------	--------