


TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -25~+70 $^{\circ}\text{C}$
3. Durability: 500 Cycles
4. Voltage rating: 1000 Vrms
5. Frequency range: 0~5 GHz
6. Cable assembly to be 100% tested for continuity

7. MATERIALS AND FINISHES

N Straight Male Connectors :

- Body & Coupling Nut - Brass plated Nickel
- Center contact - Brass plated Gold
- Insulator - PTFE
- Gasket - Silicone Rubber

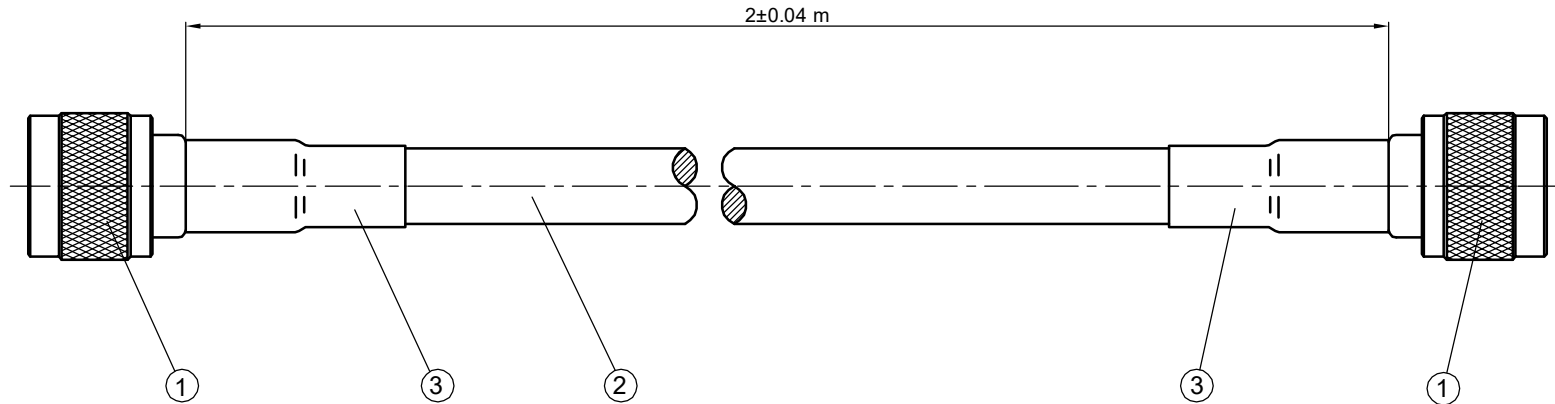

RoHS Compliant

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX ± 0.13 [0.005]
X ± 0.20 [0.008]
X ± 0.50 [0.019]

ANGULAR TOLERANCES ARE: ALL $\pm 1^{\circ}$
OVERALL CABLE LENGTH TOLERANCES ARE: $\pm 2\%$

DO NOT SCALE DRAWING

PROJECTION:



3	HST-12.7-BK	12.7mm Diameter Heat-shrinkable Tube	2
2	LLC400	Low Loss Flexible 400 Cable Double Shielded with Black PVC Jacket	1
1	50-03-1M01-006	N Straight Male Crimp for LMR400 Cable	2
S/N	Part No.	Description	QTY

DRAWN:	L. Ma	07/09/2019
CHECKED:	J. Zhu	07/09/2019
APPROVED:	M. Dong	07/09/2019

TITLE:
Cable Assembly, N Straight Male
to N Straight Male, LLC400 Cable,
2 Meters

CMP TER[®]

Cmp ter Electronics Co., Ltd. www.cmp ter.com

PART No.:
CA400-NM-NM-2M-2233

SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE		07/09/2019	M. Dong