

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
A	INITIAL RELEASE	---	L. Ma	09/14/12	M. Dong

TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -20~+80 °C
3. Durability: 500 Cycles
4. Withstanding voltage: 335 Vrms
5. Frequency range: 0~3 GHz


6. MATERIALS AND FINISHES

N Right Angle Male:

- Body & Coupling Nut - Brass plated Nickel
- Center contact - Brass plated Gold
- Insulator - PTFE
- Gasket - Silicone Rubber

MMCX Right Angle Male:

- Body - Brass plated Gold
- Center contact - Brass plated Gold
- Insulator - PTFE

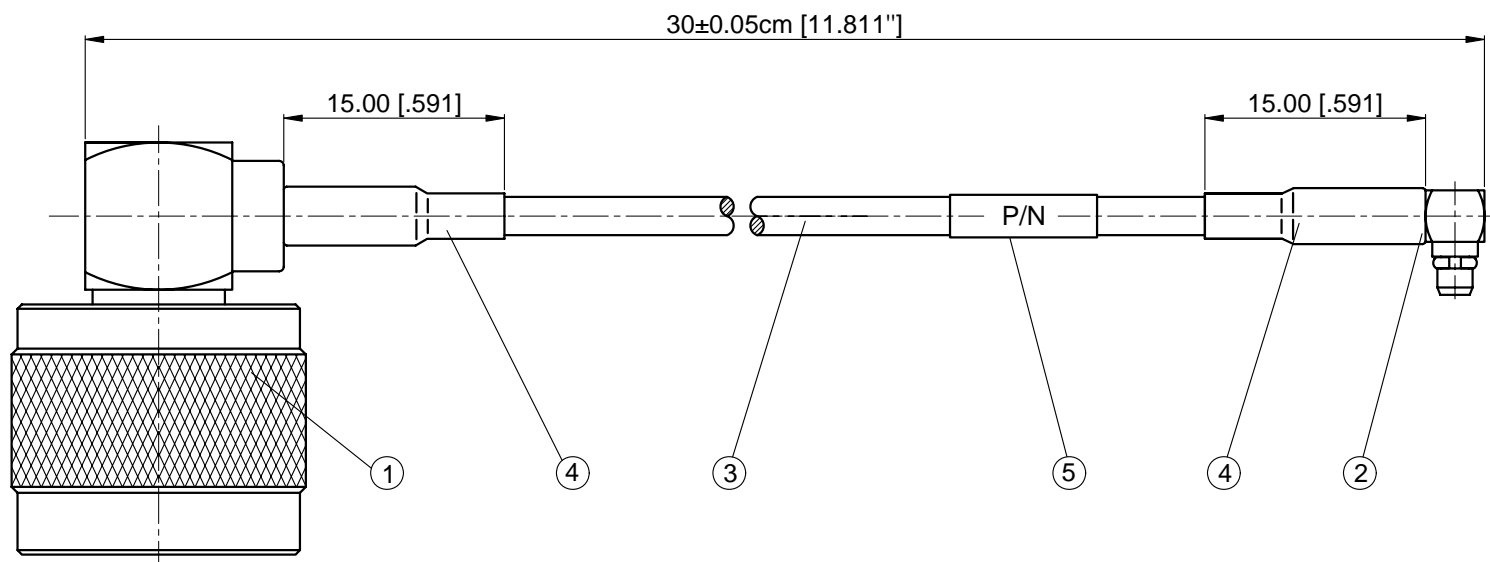

5		Customer P/N Label	1
4		Heat Shrink Tube	2
3	RG174	RG174 Cable	1
2	31-13-1M04-011	MMCX Right Angle Male Crimp for RG174/RG316/LMR100	1
1	50-13-1M00-096	N Right Angle Male Crimp for LMR100/RG174/RG316 Cable	1
S/N	Part No.	Description	QTY

DRAWN:	L. Ma 09/14/12
ENGINEER:	J. Zhu 09/14/12
APPROVED:	M. Dong 09/14/12
TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	±0.50 [.019"]
.X	±0.20 [.008"]
.XX	±0.10 [.004"]
ANGLES	±1°

TITLE:
Cable Assembly, N Right Angle Male to MMCX Right Angle Male, RG174 Cable, 30cm

CMPPTER®
www.cmptter.com

DIMENSIONS IN MILLIMETERS (mm)

Part No.: CA174-NRAM-MMCXRAM-30cm-255

SIZE: A4 SCALE: 2:1 SHEET: 1/1 REV: A

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY