


REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	04/17/2014	M. Dong

TECHNICAL DATA

1. Impedance: 75 Ω
2. Temp. range: -55~+165 °C
3. Durability: 500 Cycles
4. Withstanding voltage: 500V
5. Frequency range: 0~1 GHz
6. Cable assembly to be 100% tested for continuity

7. MATERIALS AND FINISHES

BNC Male Connector:
 Body - Brass plated Nickel
 Center contact - Brass plated Gold
 Insulator - PTFE
 Gasket - Silicone Rubber

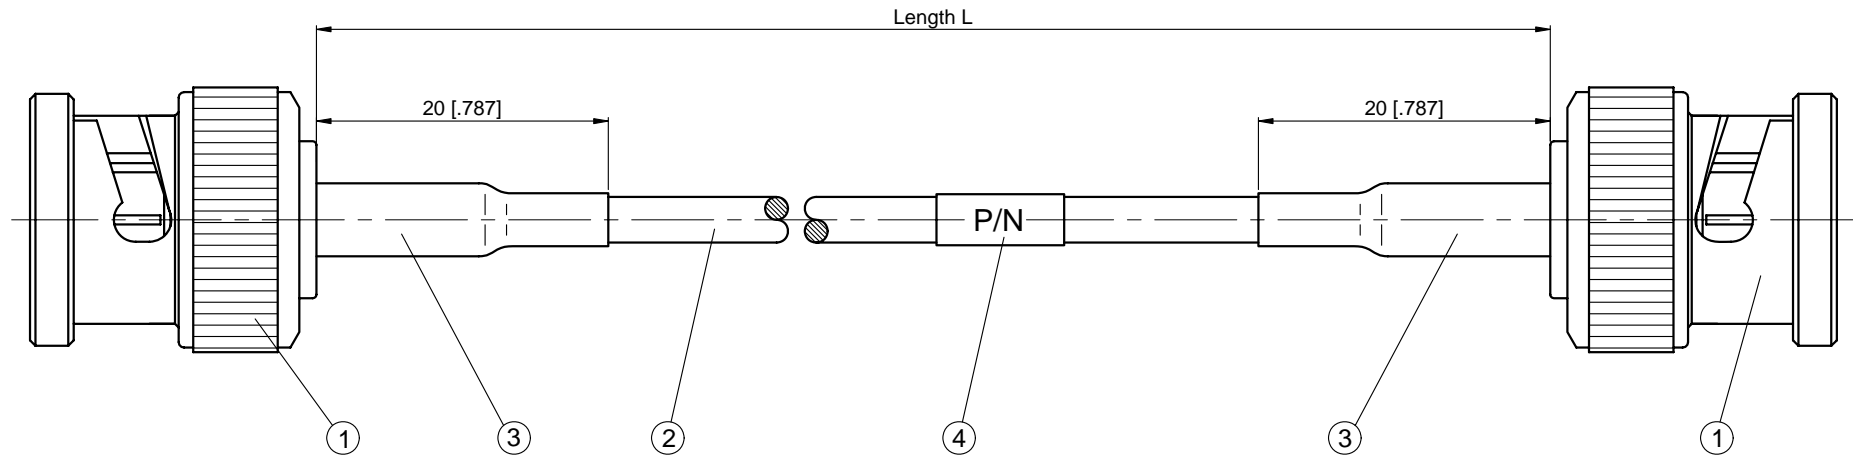

Part No.	Length L (cm)
CA179-BNCM-BNCM-80cm-604	80±1.5
CA179-BNCM-BNCM-100cm-605	100±2

4		Customer Label	1
3	HSTD-4-BK	4mm Diameter Dual Wall (Adhesive/glue) Heat-shrinkable Tube	2
2	RG179	75 Ohm Flexible RG179 Coax Cable With Single Shielded Tan FEP Jacket	1
1	10-03-1M03-064	75 Ohm BNC Straight Male Crimp for RG179/RG187 Cable	2
S/N	Part No.	Description	QTY

RoHS Compliant

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [.005"]
 .X ±0.20 [.008"]
 X ±0.50 [.019"]
 ANGULAR TOLERANCES ARE: ALL=±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN: L. Ma 04/17/2014
 CHECKED: J. Zhu 04/17/2014
 APPROVED: M. Dong 04/17/2014

TITLE:
 Cable Assembly, BNC Straight Male to BNC Straight Male, RG179 Cable

CMP_{TE}R[®]
 Cmpt_{er} Electronics Co., Ltd. www.cmpt_{er}.com

PART No.:
CA179-BNCM-BNCM-XXX-XXX

SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: A
----------	--------------	------------	--------