


TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -25~+70 °C
3. Durability: 500 Cycles
4. Withstanding voltage: 1000 V
5. Frequency range: 0~3 GHz
6. Cable assembly to be 100% tested for continuity

- 7. MATERIALS AND FINISHES**
BNC Straight Male Connectors:
 Body - Brass plated Nickel
 Coupling Nut - Brass plated Nickel
 Center contact - Brass plated Gold
 Insulator - PTFE
 Gasket - Silicone Rubber

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	06/15/2015	M. Dong

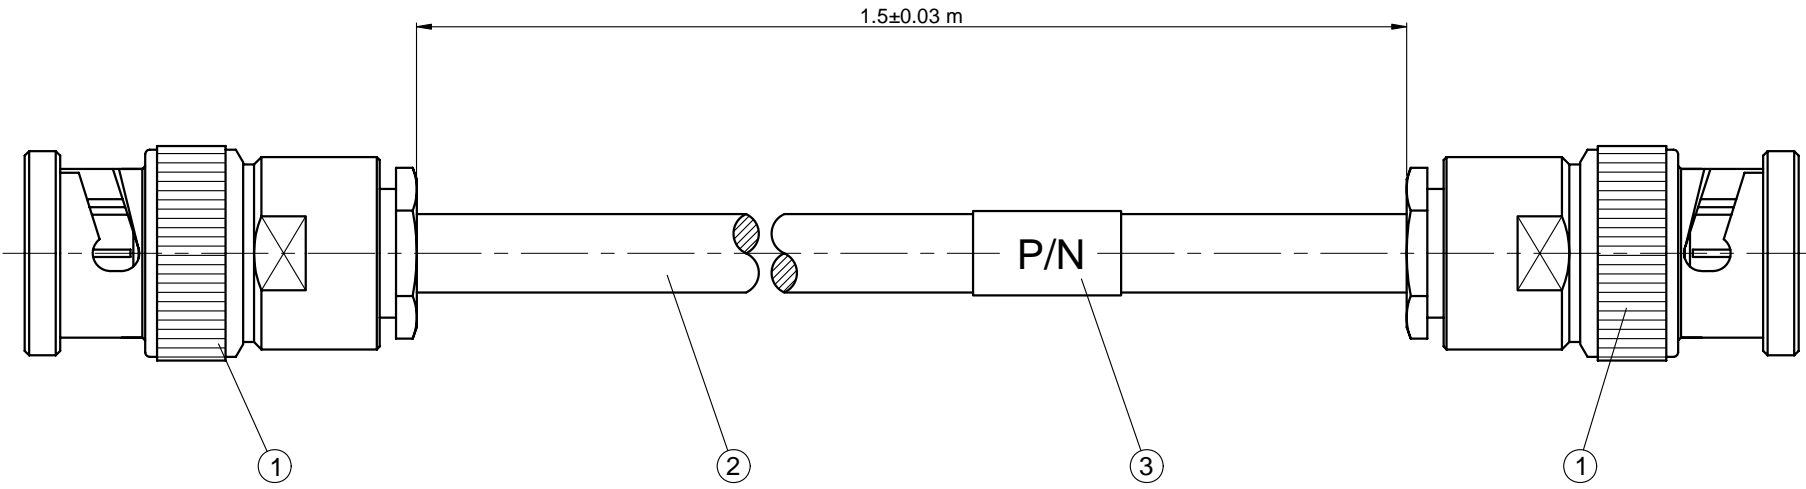

3		Customer Label	1
2	RG223	Flexible RG223 Coax Cable with Double Shielded PVC Jacket	1
1	10-03-4M18-012	BNC Straight Male Clamp for RG58/RG142/RG223/LMR195 Cable	2
S/N	Part No.	Description	QTY

ROHS Compliant

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [0.05"]
 .X ±0.20 [0.08"]
 X ±0.50 [0.19"]
 ANGULAR TOLERANCES ARE: ALL±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN: L. Ma 06/15/2015
 CHECKED: J. Zhu 06/15/2015
 APPROVED: M. Dong 06/15/2015

TITLE:
Cable Assembly, BNC Straight Male to BNC Straight Male, RG223 Cable, 1.5 Meters

CMPPTER®
 Cmptter Electronics Co., Ltd. www.cmptter.com
 PART No.: **CA223-BNCM-BNCM-1.5M-919**
 SIZE: A4 SCALE: 2:1 SHEET: 1/1 REV: A

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.