


TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -55~+165 $^{\circ}\text{C}$
3. Durability: 500 Cycles
4. Withstanding voltage: 500 Vrms
5. Frequency range: 0~1 GHz
6. Cable assembly to be 100% tested for continuity

7. MATERIALS AND FINISHES

BNC Right Angle Male Connectors:
Body & Nut - Brass plated Nickel
Center contact - Brass plated Gold
Insulator - PTFE
Gasket - Silicone Rubber

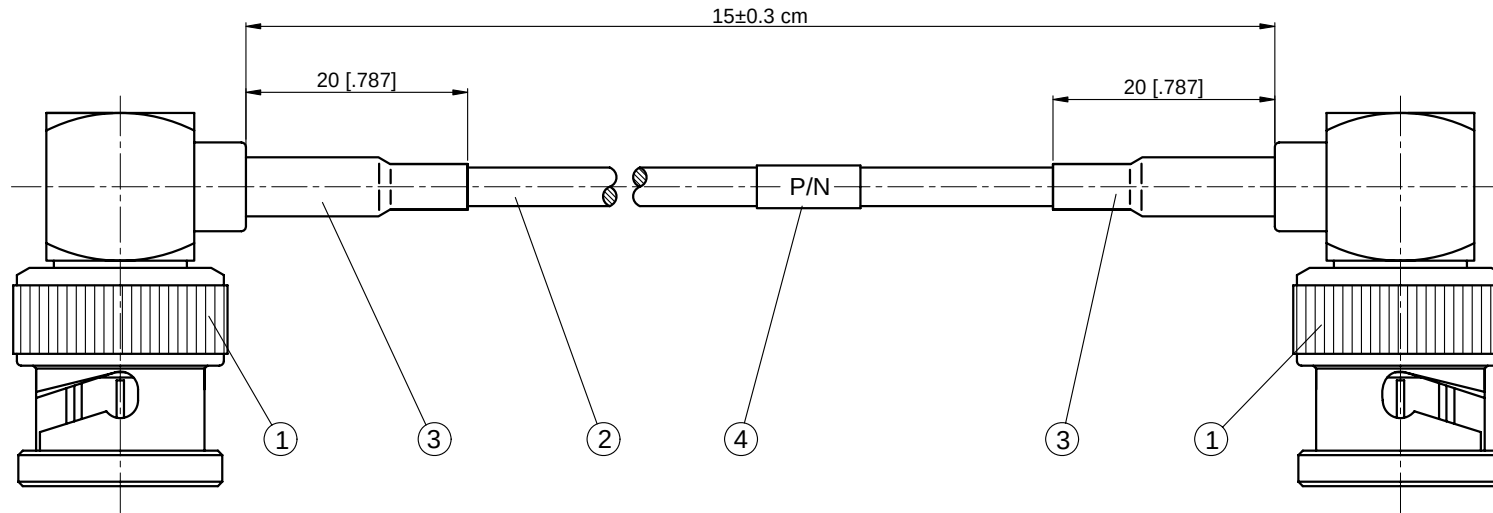

RoHS Compliant

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:	
.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
ANGULAR TOLERANCES ARE: ALL ±1°	
OVERALL CABLE LENGTH TOLERANCES ARE: ±2%	
DO NOT SCALE DRAWING	
PROJECTION:	

4		Customer Label	1
3	HSTD-4-BK	4mm Diameter Dual Wall (Adhesive/glue) Heat-shrinkable Tube	2
2	RG316D	Flexible RG316D Coax Cable Double Shielded with Tan FEP Jacket	1
1	10-13-1M04-067	BNC Right Angle Male Crimp for RG316D Cable	2
S/N	Part No.	Description	QTY

DRAWN:	L. Ma	09/30/2014
CHECKED:	J. Zhu	09/30/2014
APPROVED:	M. Dong	09/30/2014

TITLE:
Cable Assembly, BNC Right Angle Male to BNC Right Angle Male, RG316D Cable, 15cm

CMPTER®

Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:
CA316D-BNCRAM-BNCRAM-15cm-699

SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------