

TECHNICAL DATA


1. Impedance: 50 Ω
2. Temp. range: -20~+80 $^{\circ}\text{C}$
3. Withstanding voltage: 1000 Vrms
4. Frequency range: 0~3 GHz
5. Durability: 500 cycles
6. Cable assembly to be 100% tested for continuity

7. MATERIALS AND FINISHES

BNC Straight Male Connectors:

- Body & Coupling Nut - Brass plated Nickel
- Center Contact - Brass plated Gold
- Insulator - PTFE
- Gasket - Silicone Rubber

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE		09/12/2013	M. Dong

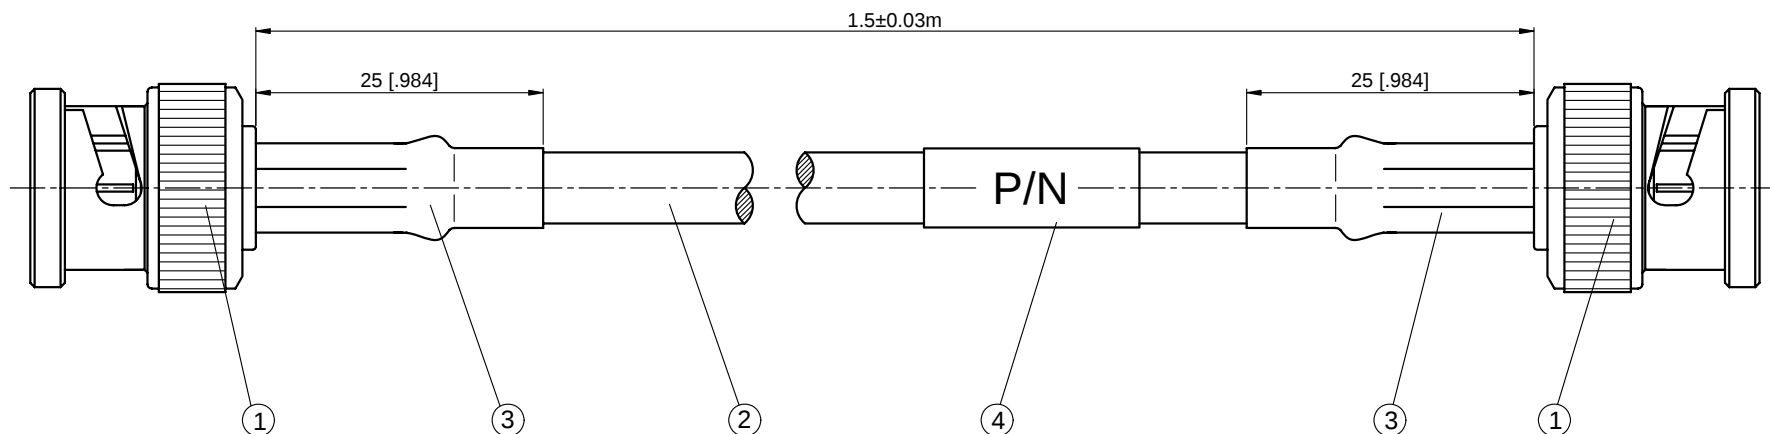

4		Customer Label	1
3	HST-7-BK	Diameter 7mm Heat-shrinkable Tube (Black)	2
2	RG58	Flexible RG58 Coax Cable Single shielded with Black PVC Jacket	1
1	10-03-1M18-003	BNC Striaight Male Crimp for LMR195/RG58 Cable	2
S/N	Part No.	Description	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:	
.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
ANGULAR TOLERANCES ARE: ALL ±1°	
OVERALL CABLE LENGTH TOLERANCES ARE: ±2%	
DO NOT SCALE DRAWING	
PROJECTION:	

DRAWN:	L. Ma	09/12/2013
CHECKED:	J. Zhu	09/12/2013
APPROVED:	M. Dong	09/12/2013

TITLE:
Cable Assembly, BNC Straight Male to BNC Straight Male, RG58 Cable, 1.5 Meters

CMPTEER[®]

Cmpteer Electronics Co., Ltd. www.cmpteer.com

PART No.:
CA58-BNCM-BNCM-1.5M-405

SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A
----------	------------	------------	--------

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.