


TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -20~+80 °C
3. Durability: 500 Cycles
4. Voltage rating: 500 Vrms
5. Frequency range: 0~3GHz
6. Cable assembly to be 100% tested for continuity

7. MATERIALS AND FINISHES
- SMA Straight Male Connector:
Body & Coupling Nut - Brass plated Gold
Center contact - Brass plated Gold
Insulator - PTFE
Gasket - Silicone Rubber

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	05/13/2014	
B	CUSTOMER LABEL REMOVED	—	08/21/2018	
C	UNIT CHANGED	—	08/22/2018	

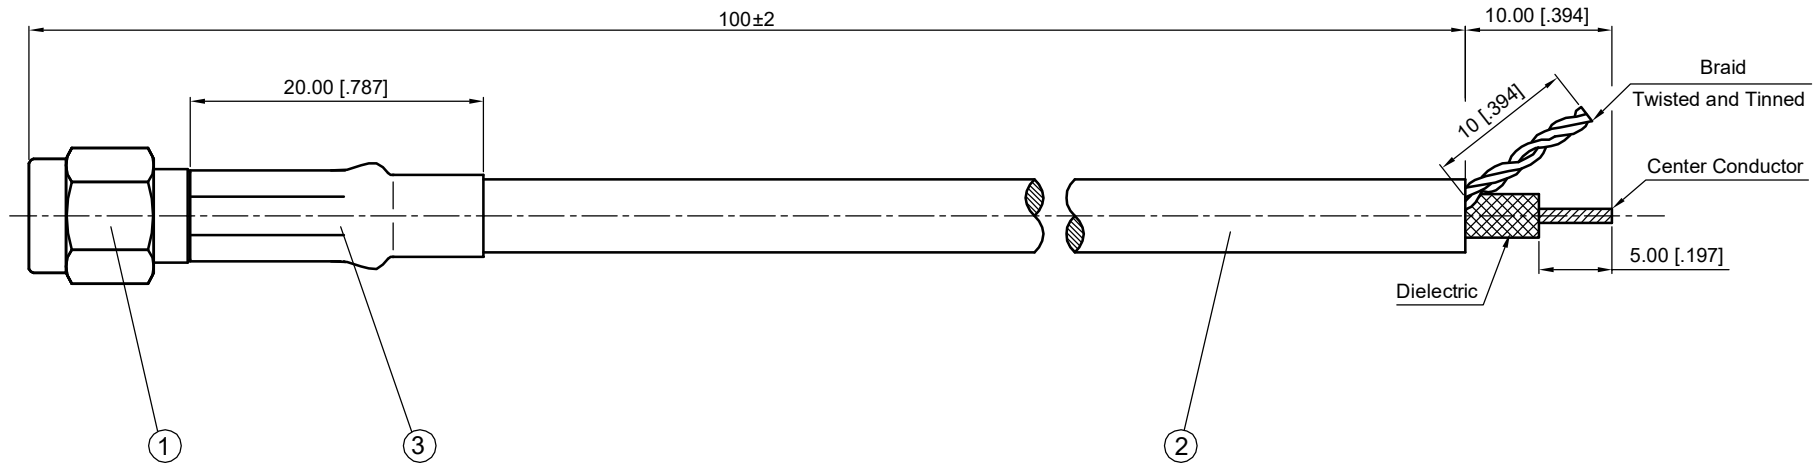

RoHS Compliant

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

3	HST-6.5	6.5mm Diameter Heat-shrinkable Tube (Color see Table)	1
2	RG58	Flexible RG58 Coax Cable Single shielded with Black PVC Jacket	1
1	60-03-1M18-004	SMA Straight Male Crimp for LMR195/RG58 Cable	1
S/N	Part No.	Description	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX ±0.13 [.005]
.X ±0.20 [.008]
X ±0.50 [.019]

ANGULAR TOLERANCES ARE: ALL= ±1°
OVERALL CABLE LENGTH TOLERANCES ARE: ±2%

DO NOT SCALE DRAWING

PROJECTION:



DRAWN: 08/22/2018
CHECKED: 08/22/2018
APPROVED: 08/22/2018

TITLE:

Cable Assembly, SMA Straight
Male to None, RG58 Cable,
100mm

CMPTEER®

Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:

CA58-SMAM-NONE-100mm-615

SIZE:
A4

SCALE:
2:1

SHEET:
1/1

REV:
C