


TECHNICAL DATA

1. Impedance: 75 Ω
2. Temp. range: -25~+70 °C
3. Durability: 500 Cycles
4. Voltage rating: 1000 Vrms
5. Frequency range: 0~3 GHz
6. Cable assembly to be 100% tested for continuity

7. MATERIALS AND FINISHES

- N Straight Male Connector:
 Body & Coupling Nut - Brass plated Nickel
 Center contact - Brass plated Gold
 Insulator - PTFE
 Gasket - Silicone Rubber

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	---	02/18/2014	M. Dong
B	CABLE IMPEDANCE CORRECT	---	02/20/2014	M. Dong

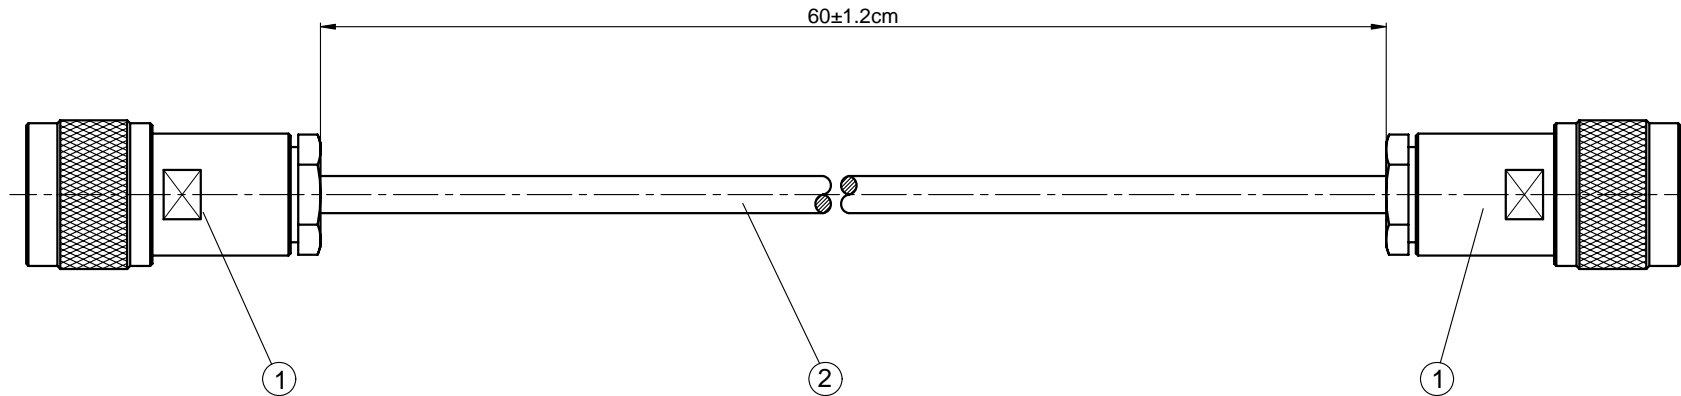

2	RG6	75 Ohm Flexible RG6 Coax Cable with Double Shielded PVC Jacket	1
1	50-03-4M41-109	75 Ohm N Straight Male Clamp for RG6 Cable	2
S/N	Part No.	Description	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [0.005]
 .X ±0.20 [0.008]
 X ±0.50 [0.019]
 ANGULAR TOLERANCES ARE: ALL±1°
 OVERALL CABLE LENGTH TOLERANCES ARE: ±2%
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN: L. Ma 02/20/2014
 CHECKED: J. Zhu 02/20/2014
 APPROVED: M. Dong 02/20/2014

TITLE:
Cable Assembly, N Straight Male to N Straight Male, RG6 Cable, 60cm

CMPPTER[®]
 Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:
CA6-NM-NM-60cm-527

SIZE: A4 SCALE: 1:1 SHEET: 1/1 REV: B

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.