


MIC1.13

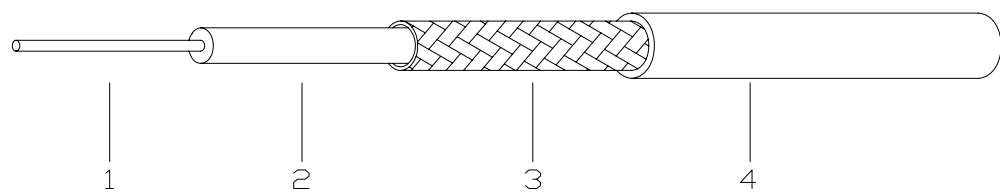

Construction Specification		
	Material	Diameter(mm)
1.Inner Conductor	Silver Plated Copper Clad Steel	7×0.08
2.Dielectric	PTFE	0.68
3.Outer Conductor	Silver Plated Copper Braid	0.88
4.Jacket	FEP	1.13

Electrical Characteristics	
Capacitance(PF/m)	95.6
Impedance(ohm)	50
Velocity(%)	70
Bending Radius(mm)	4
Max.Oper Voltage(VMS)	1000
Max.Oper Frequency(MHz)	6000
Operating Temp(℃)	-55 to +200

Attenuation	
Frequency(MHz)	Attenuation (dB/100m)
1000	230
2000	310
3000	390
4000	460
5000	510
6000	580