

TECHNICAL DATA

Electrical

Impedance 50 Ω
Frequency range 0~6 GHz
VSWR ≤1.20
Average Power 10W

Mechanical & Environmental

Durability (matings) >500
Temperature range -40 °C ~ +85 °C
RoHS Compliant Yes


Material & Finish

Body Brass, Tri-Metal -plated
Pin Contact Brass, Silver-plated
Coupling Nut Brass, Nickel-plated
Radiator Aluminium, Blackening
Insulator PTFE
Gasket Silicone Rubber

Interface Standards

N MIL-STD-348A

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	03/10/2020	M. Dong

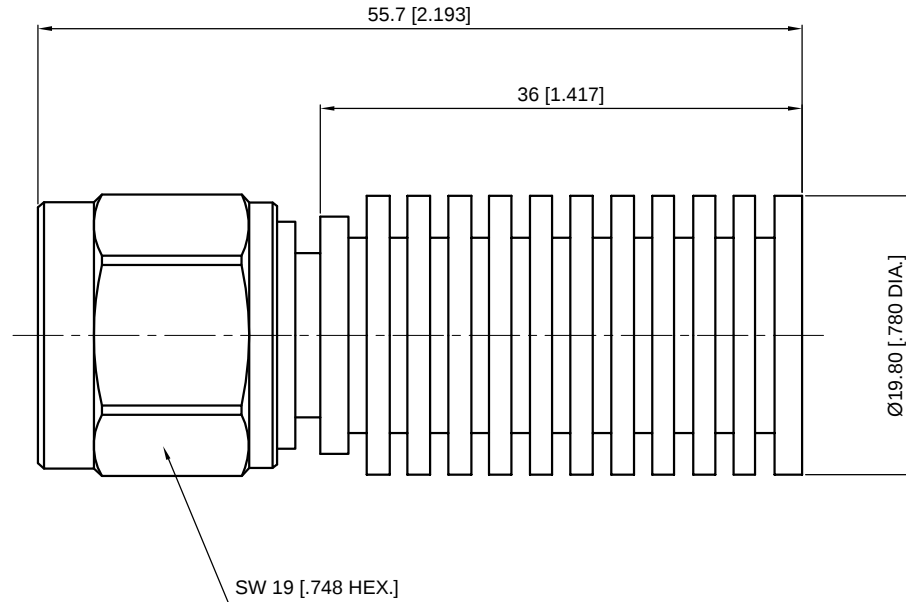

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
.XX ±0.13 [.005"]
X ±0.20 [.008"]
X ±0.50 [.019"]
ANGULAR TOLERANCES ARE: ALL= ±1°
DO NOT SCALE DRAWING
PROJECTION:

DRAWN:	L. Ma	03/10/2020
CHECKED:	J. Zhu	03/10/2020
APPROVED:	M. Dong	03/10/2020

TITLE:
Termination, N Male,
10 Watts, DC to 6GHz

Cmptel Electronics Co., Ltd. www.cmpter.com

PART No.: T-NM-067			
SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A