

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	06/30/2020	M. Dong

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~6 GHz
VSWR	≤ 1.25
Average Power	2W

Mechanical & Environmental


Durability (matings)	>500
Temperature range	-40 °C ~ +85 °C
RoHS Compliant	Yes

Material & Finish

Body	Brass, Nickel -plated
Pin Contact	Brass, Gold-plated
Coupling Nut	Brass, Nickel-plated
Insulator	PTFE
Gasket	Silicone Rubber

Interface Standards

N	MIL-STD-348A
---	--------------

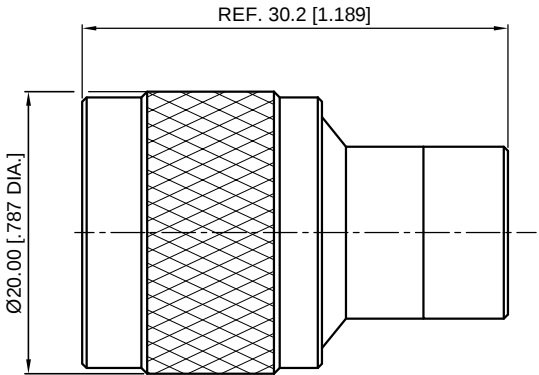

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ± 0.13 [.005"] X ± 0.20 [.008"] X ± 0.50 [.019"] ANGULAR TOLERANCES ARE: ALL = $\pm 1^\circ$	
DO NOT SCALE DRAWING	
PROJECTION:	

DRAWN:	L. Ma	06/30/2020
CHECKED:	J. Zhu	06/30/2020
APPROVED:	M. Dong	06/30/2020

TITLE:
Termination, N Male,
2 Watts, DC to 6GHz

 Cmptter Electronics Co., Ltd. www.cmptter.com			
PART No.: T-NM-072			
SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A