

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	10/15/2015	M. Dong
B	DIMENSIONS CHANGED	—	05/12/2022	M. Dong

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~40 GHz
VSWR	1.30:1
Average Power	1W

Mechanical & Environmental


Durability (matings)	>500
Temperature range	-55 °C ~ +125 °C
RoHS Compliant	Yes

Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy,Gold-plated
Coupling nut	Stainless Steel (SU303), Passivated

Interface Standards

SSMA	MIL-STD-348A
------	--------------

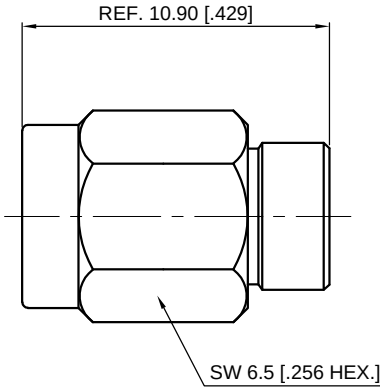

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
.XX ± 0.13 [.005"]
X ± 0.20 [.008"]
X ± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	05/12/2022
CHECKED:	J. Zhu	05/12/2022
APPROVED:	M. Dong	05/12/2022

TITLE:

Precision SSMA Male
Termination, 1W, 40GHz

CMPPTER®

Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:

TP-SSMA-034

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: B
-------------	---------------	---------------	-----------

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.