

A B C D E F G H I J

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	07/25/2017	M. Dong

TECHNICAL DATA

Electrical

Impedance 50 Ω
 Frequency range 0~40 GHz
 VSWR 1.20:1

Mechanical & Environmental


Durability (matings) >500
 Temperature range -55 °C ~ +165 °C
 RoHS Compliant Yes

Material & Finish

Body Stainless Steel (SU303), Passivated
 Pin Contact Beryllium Copper Alloy, Gold-plated
 Insulator PEI, PTFE

Interface Standards

2.4mm IEC61169
 SSMA MIL-STD-348A

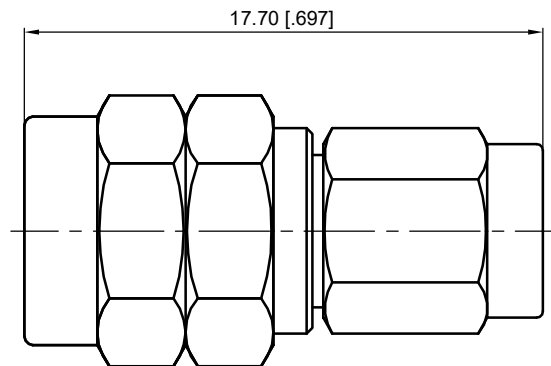

1
2
3
4
5
6
7

1
2
3
4
5
6
7

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [0.005"] .X ±0.20 [0.008"] X ±0.50 [0.019"] ANGULAR TOLERANCES ARE: ALL= ±1° DO NOT SCALE DRAWING
PROJECTION:

DRAWN:	L. Ma	07/25/2017
CHECKED:	J. Zhu	07/25/2017
APPROVED:	M. Dong	07/25/2017

TITLE:
Precision Adapter, 2.4mm Male to SSMA Male

CMP TER®
 Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:
P-2.4M-SSMAM-323

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
----------	------------	------------	--------

A B C D E F G H I J