

TECHNICAL DATA

Electrical

Impedance 50 Ω
Frequency range 0~3 GHz
Withstanding voltage ≥2500V
Insulation resistance ≥5000MΩ

Mechanical & Environmental

Durability (matings) >500
Temperature range -65 °C ~ +165 °C
RoHS Compliant Yes


Material & Finish

Body Brass, Albaloy-plated
Pin Contact Phosphor Bronze, Silver-plated
Gasket Silicone Rubber

Interface Standards

7/16 IEC 60169-4
4.3-10 IEC61169-54

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	06/18/2021	M. Dong

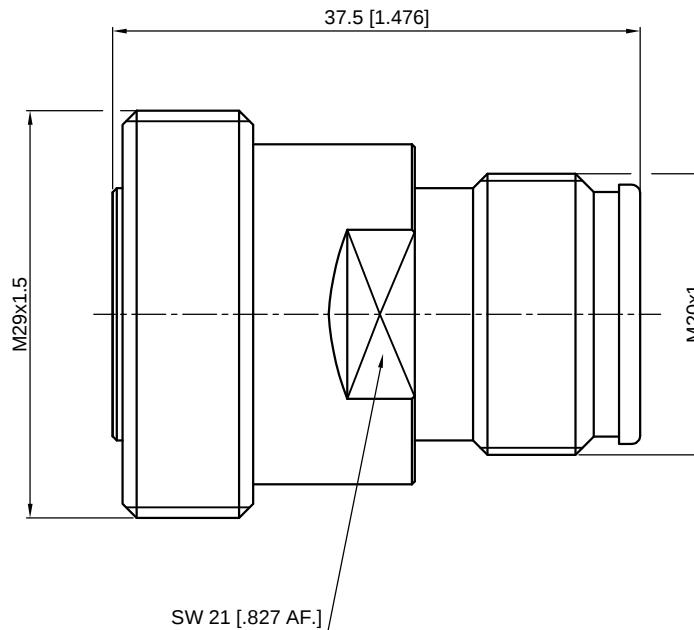

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL±1° DO NOT SCALE DRAWING PROJECTION:	DRAWN:	L. Ma	06/18/2021	 Cmpter Electronics Co., Ltd. www.cmpter.com	
	CHECKED:	J. Zhu	06/18/2021		
	APPROVED:	M. Dong	06/18/2021		
	TITLE:			PART No.:	A-716F-4.310F-463
Adapter, 7/16 Female to 4.3/10 Female			SIZE: A4	SCALE: 2:1	SHEET: 1/1
				REV: A	