

A B C D E F G H I J

TECHNICAL DATA

Electrical

Impedance 50 Ω
 Frequency range 0~3 GHz
 Withstanding voltage ≥2500V
 Insulation resistance ≥5000MΩ

Mechanical & Environmental

Durability (matings) >500
 Temperature range -65 °C ~ +165 °C
 RoHS Compliant Yes


Material & Finish

Body Brass, Albaloy-plated
 Pin Contact Phosphor Bronze, Silver-plated
 Insulator PTFE
 Gasket Silicone Rubber

Interface Standards

N IEC 60169-16
 4.3-10 IEC61169-54

| REVISIONS | | | | |
|-----------|-------------------------|---------|------------|----------|
| REV | DESCRIPTION OF REVISION | ECN No. | DATE | APPROVED |
| A | INITIAL RELEASE | --- | 12/11/2018 | M. Dong |
| B | SW 16 →SW 19 | --- | 10/30/2019 | M. Dong |

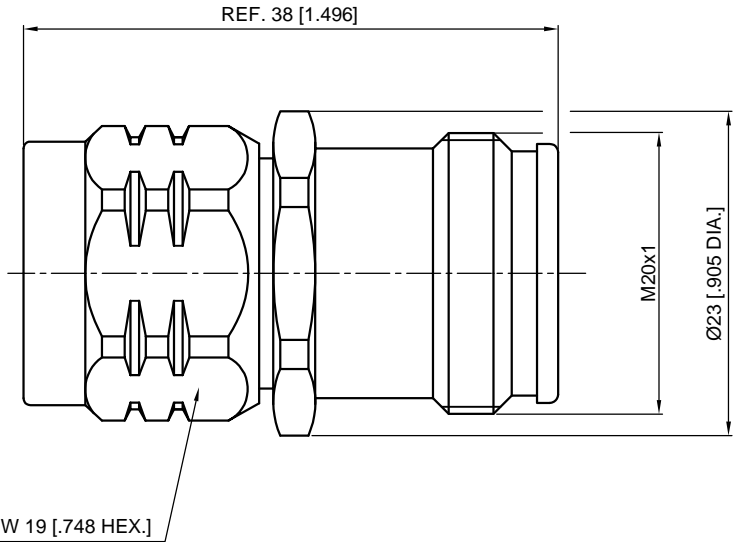

| | |
|--|------------------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES). UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL= ±1° | DRAWN: L. Ma 10/30/2019 |
| DO NOT SCALE DRAWING | CHECKED: J. Zhu 10/30/2019 |
| PROJECTION: | APPROVED: M. Dong 10/30/2019 |

| |
|---|
| TITLE: Adapter, N Male to 4.3/10 Female |
|---|

CMP TER[®]
 Cmp ter Electronics Co., Ltd. www.cmp ter.com

PART No.:
A-NM-4.310F-353

| | | | |
|----------|------------|------------|--------|
| SIZE: A4 | SCALE: 2:1 | SHEET: 1/1 | REV: B |
|----------|------------|------------|--------|

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

A B C D E F G H I J