

TECHNICAL DATA

Electrical

Impedance 50 Ω
Frequency range 0~3 GHz
Withstanding voltage ≥2500V
Insulation resistance ≥5000MΩ

Mechanical & Environmental

Durability (matings) >500
Temperature range -65 °C ~ +165 °C
RoHS Compliant Yes


Material & Finish

Body Brass, Albaloy-plated
Pin Contact Phosphor Bronze,Silver-plated
Insulator PTFE
Gasket Silicone Rubber

Interface Standards

N IEC 60169-16
4.3-10 IEC61169-54

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	04/12/2019	M. Dong

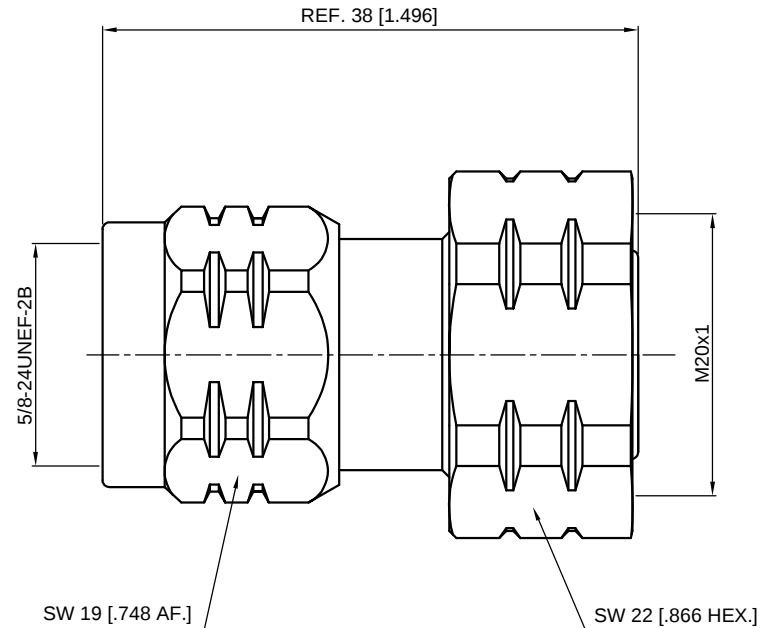

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES] . UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL= ±1° DO NOT SCALE DRAWING PROJECTION: 	DRAWN:	L. Ma	04/12/2019	 Cmpter Electronics Co., Ltd. www.cmpter.com			
	CHECKED:	J. Zhu	04/12/2019				
	APPROVED:	M. Dong	04/12/2019				
	TITLE:				PART No.:		
Adapter, N Male to 4.3/10 Male				TWA-NM-4.310M-381			
				SIZE:	SCALE:	SHEET:	REV:
				A4	2:1	1/1	A