

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~3 GHz
Withstanding voltage	$\geq 2500V$
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental


Durability (matings)	>500
Temperature range	-65 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Brass, Albaloy-plated
Pin Contact	Phosphor Bronze, Silver-plated
Insulator	PTFE

Interface Standards

4.3-10	IEC61169-54
--------	-------------

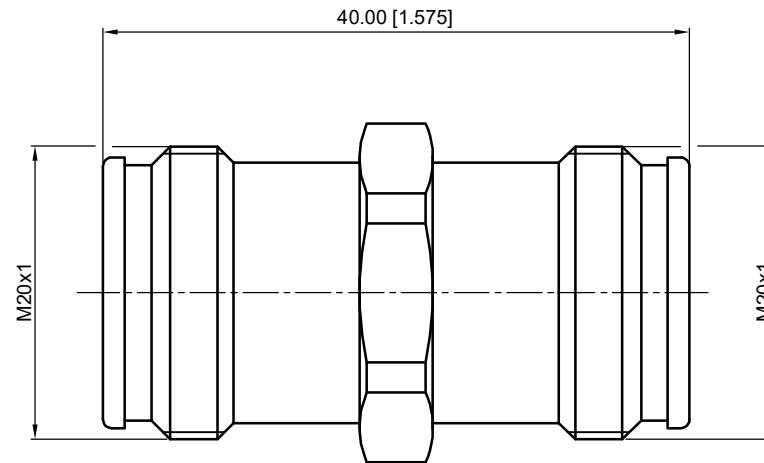

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:
A-4.310F-4.310F-355

SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	± 0.13 [.005"]
.X	± 0.20 [.008"]
X	± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL= $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	12/11/2018
CHECKED:	J. Zhu	12/11/2018
APPROVED:	M. Dong	12/11/2018

TITLE:
**Adapter, 4.3/10 Female to
4.3/10 Female**

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	12/11/2018	M. Dong