

A B C D E F G H I J

TECHNICAL DATA

Electrical

Impedance 50 Ω
 Frequency range 0~1 GHz
 Withstanding voltage 1000 V
 Insulation resistance ≥5000MΩ


Mechanical & Environmental

Durability (matings) >500
 Temperature range -65 °C ~ +165 °C
 RoHS Compliant Yes

Material & Finish

Body Brass, Nickel-plated
 Pin Contact Phosphor Bronze, Gold-plated
 Coupling nut Brass, Nickel-plated
 Insulator PTFE
 Gasket Silicone rubber

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	11/10/2019	M. Dong

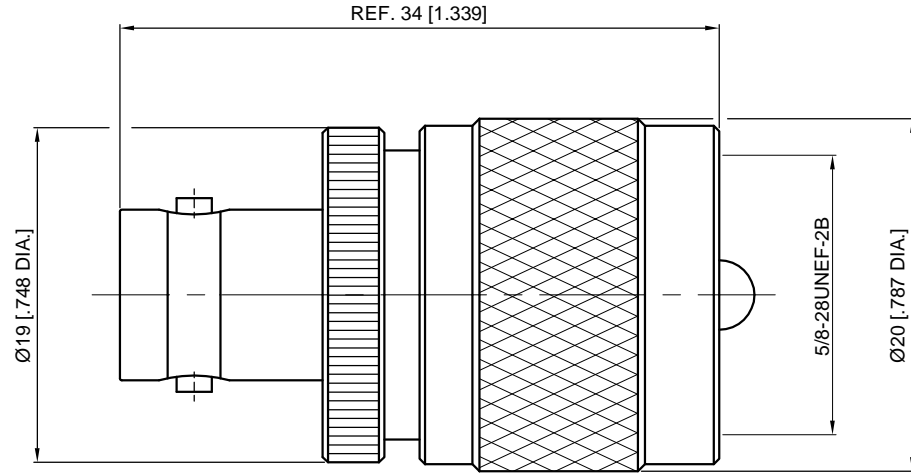

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
 UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
 .XX ±0.13 [005"]
 X ±0.20 [008"]
 X ±0.50 [019"]
 ANGULAR TOLERANCES ARE: ALL±1°
 DO NOT SCALE DRAWING
 PROJECTION:

DRAWN:	L. Ma	11/10/2019
CHECKED:	J. Zhu	11/10/2019
APPROVED:	M. Dong	11/10/2019

TITLE:
Adapter, BNC Female to UHF Male

CMP TER®
 Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:
A-BNCF-UHFM-421

SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: A
----------	--------------	------------	--------

A B C D E F G H I J