

# TECHNICAL DATA

## Electrical

Impedance	50 Ω
Frequency range	0~4 GHz
Withstanding voltage	1000 V
Insulation resistance	≥5000MΩ

## Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes



## Material & Finish

Body	Brass, Nickel-plated
Pin Contact	Brass Phosphor Bronze, Gold-plated
Insulator	PTFE

## Interface Standards

BNC	IEC 60169
-----	-----------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	---	05/24/2010	M. Dong
B	DIMENSIONS CHANGED	---	08/19/2014	M. Dong

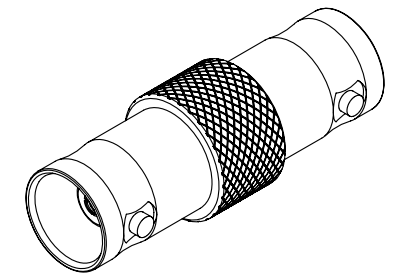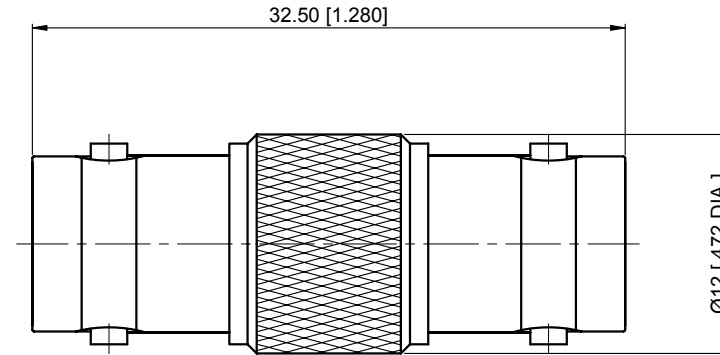

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL=±1°	DRAWN: L. Ma 08/19/2014
DO NOT SCALE DRAWING	CHECKED: J. Zhu 08/19/2014
PROJECTION:	APPROVED: M. Dong 08/19/2014

TITLE: <b>Adapter, BNC Female to BNC Female</b>
--

 Cmppter Electronics Co., Ltd. <a href="http://www.cmppter.com">www.cmppter.com</a>			
PART No.: <b>A-BNCF-BNCF-073</b>			
SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: B

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
  - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.