

TECHNICAL DATA

Electrical

Impedance	75 Ω
Frequency range	0~1 GHz
Withstanding voltage	1000 V
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental




Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Brass, Nickel-plated
Pin Contact	Phosphor Bronze, Gold-plated
Fastening nut	Brass, Nickel-plated
Insulator	PTFE

Interface Standards

BNC	IEC-60169
-----	-----------

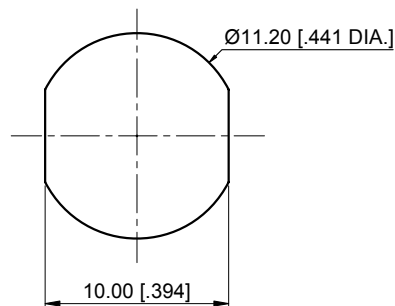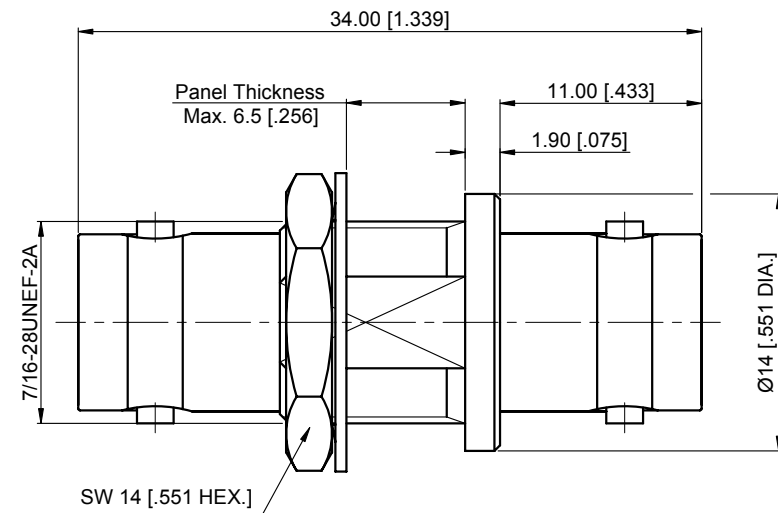

Recommended Mounting Hole

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

REVISIONS			
REV	DESCRIPTION OF REVISION	ECN No.	DATE
A	INITIAL RELEASE		05/19/2014

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

XX	± 0.13 [0.005"]
.X	± 0.20 [0.008"]
X	± 0.50 [0.019"]

ANGULAR TOLERANCES ARE: ALL $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:

DRAWN:	L. Ma	05/19/2014
CHECKED:	J. Zhu	05/19/2014
APPROVED:	M. Dong	05/19/2014

TITLE:

Adapter, 75 Ohm BNC
Bulkhead Female to BNC
Female

CMPPTER®

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:

A-BNCF-BNCF-242

SIZE:	SCALE:	SHEET:	REV:
A4	4:1	1/1	A