

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~1 GHz
Operating Voltage	≤ 500 Volts
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental


Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Brass, Nickel-plated
Pin Contact	Brass & Phosphor Bronze, Gold-plated
Coupling Nut	Brass, Nickel-plated
Insulator	PTFE
Gasket	Silicone Rubber

Interface Standards

BNC	IEC 60169
-----	-----------

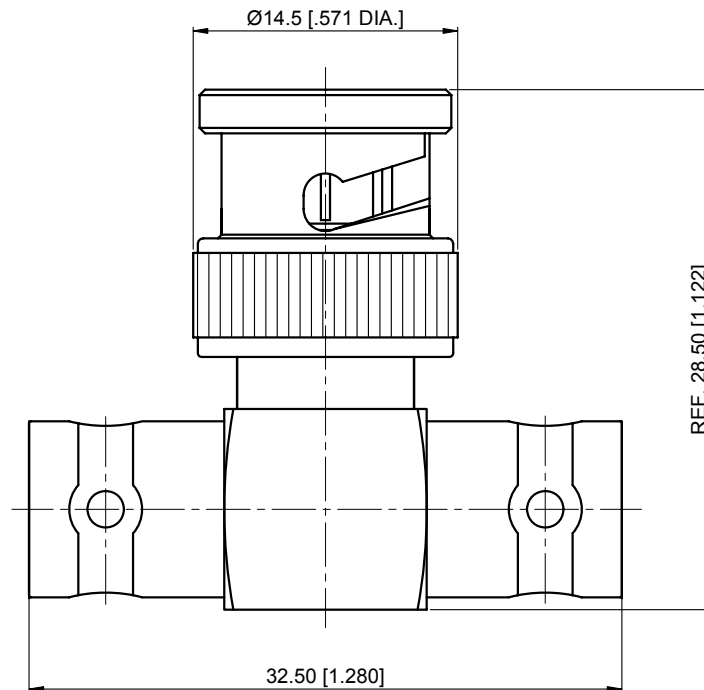

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	± 0.13 [.005"]
X	± 0.20 [.008"]
X	± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:

DRAWN:	L. Ma	08/19/2014
CHECKED:	J. Zhu	08/19/2014
APPROVED:	M. Dong	08/19/2014

TITLE:

**Tee Adapter, BNC
Female-Male-Female**

CMPTEER[®]

Cmpter Electronics Co., Ltd. www.cmpter.com

PART No.:
A-BNCF-BNCF-BNCF-243

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------