

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~3 GHz
Withstanding voltage	1000 V
Insulation resistance	≥5000MΩ

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes


Material & Finish

Body	Brass, Nickel-plated
Coupling nut	Brass, Nickel-plated
Pin Contact	Phosphor Bronze, Gold-plated
Gasket	Silicone rubber
Insulator	PTFE

Interface Standards

BNC	IEC-60169
-----	-----------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	---	07/01/2010	M. Dong
B	STRUCTURE CHANGED	---	03/16/2018	M. Dong

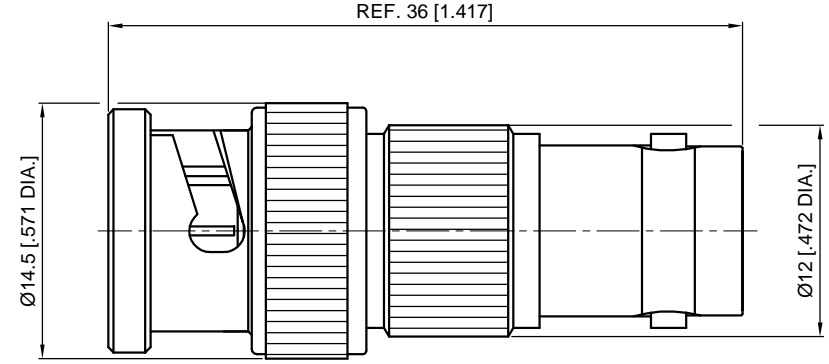

1
2
3
4
5
6
7

1
2
3
4
5
6
7

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

<small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES). UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL= ±1° DO NOT SCALE DRAWING PROJECTION:</small>	DRAWN:	L. Ma	03/16/2018
	CHECKED:	J. Zhu	03/16/2018
	APPROVED:	M. Dong	03/16/2018
TITLE:		Adapter, BNC Male to BNC Female	

CMP TER®
Cmpter Electronics Co., Ltd. www.cmpter.com

PART No.:
A-BNCM-BNCF-078

SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: B
-------------	-----------------	---------------	-----------