

# TECHNICAL DATA

## Electrical

Impedance	50 Ω
Frequency range	0~3 GHz
Withstanding voltage	1000 V
Insulation resistance	≥5000MΩ

## Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes


## Material & Finish

Body	Brass, Nickel-plated
Coupling Nut	Brass, Nickel-plated
Pin Contact	Phosphor Bronze, Gold-plated
Insulator	PTFE
Gasket	Silicone Rubber

## Interface Standards

N	IEC-60169
BNC	IEC-60169

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	---	04/01/2007	M. Dong
B	STRUCTURE CHANGED	---	10/11/2015	M. Dong

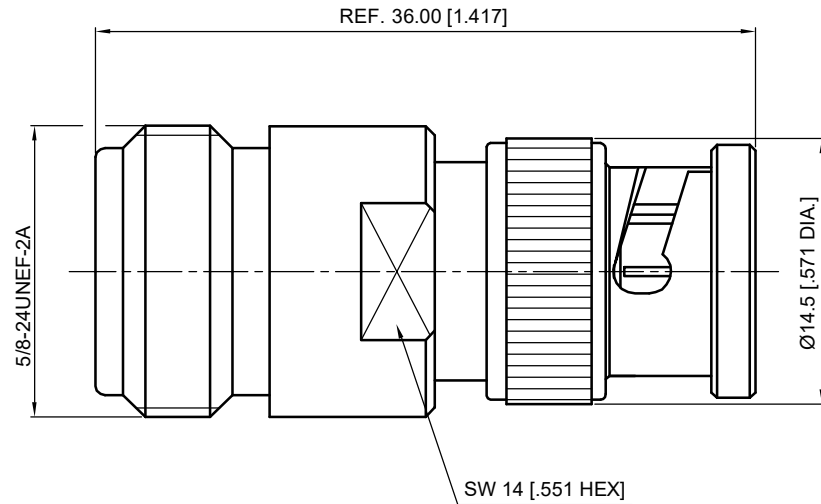

### NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"]	DRAWN: L. Ma 10/11/2015
ANGULAR TOLERANCES ARE: ALL= ±1°	CHECKED: J. Zhu 10/11/2015
DO NOT SCALE DRAWING	APPROVED: M. Dong 10/11/2015
PROJECTION:	TITLE: Adapter, N Female to BNC Male

DRAWN:	L. Ma	10/11/2015
CHECKED:	J. Zhu	10/11/2015
APPROVED:	M. Dong	10/11/2015



Cmppter Electronics Co., Ltd. [www.cmppter.com](http://www.cmppter.com)

PART No.: **A-NF-BNCM-010**

SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: B
----------	--------------	------------	--------