

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~18 GHz
VSWR	1.25:1

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes


Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI

Interface Standards

N	MIL-STD-348A
---	--------------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	10/11/2014	M. Dong

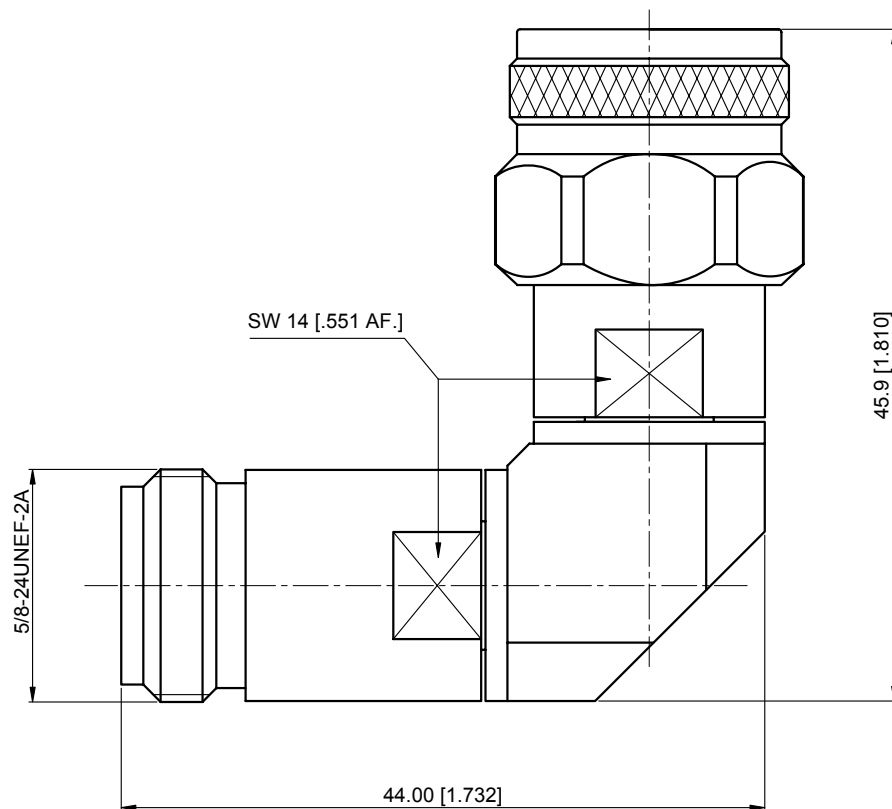

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS
ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL
TOLERANCES ARE:

.XX	± 0.13 [.005"]
.X	± 0.20 [.008"]
X	± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:

DRAWN:	L. Ma	10/11/2014
CHECKED:	J. Zhu	10/11/2014
APPROVED:	M. Dong	10/11/2014

TITLE:

Precision Adapter, Right
Angle, N Male to N Female

CMPTEER®

Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:

PR-NM-NF-248

SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A
-------------	---------------	---------------	-----------