

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~ 6 GHz
Withstanding voltage	1000 V
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-65 °C ~ +165 °C
RoHS Compliant	Yes


Material & Finish

Body	Brass, Nickel-plated
Coupling Nut	Brass, Nickel-plated
Pin Contact	Phosphor Bronze ,Gold-plated
Insulator	PTFE
Gasket	Silicone Rubber

Interface Standards

N	IEC-60169
TNC	IEC-60169

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	03/27/2018	M. Dong

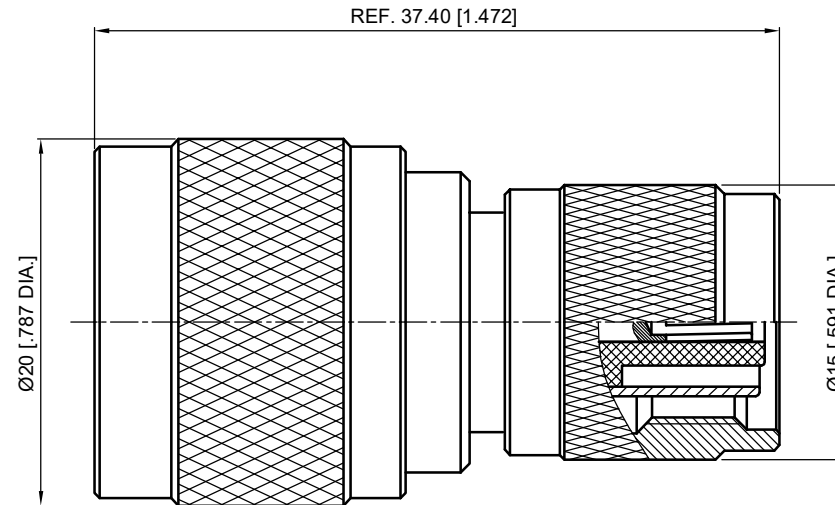

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	± 0.13 [.005"]
.X	± 0.20 [.008"]
X	± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL= $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:

DRAWN:	L. Ma	03/27/2018
CHECKED:	J. Zhu	03/27/2018
APPROVED:	M. Dong	03/27/2018

TITLE:

Adapter, N Male to
RP TNC Male

CMPter®
Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:

A-NM-RPTNCM-334

SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: A
-------------	-----------------	---------------	-----------