


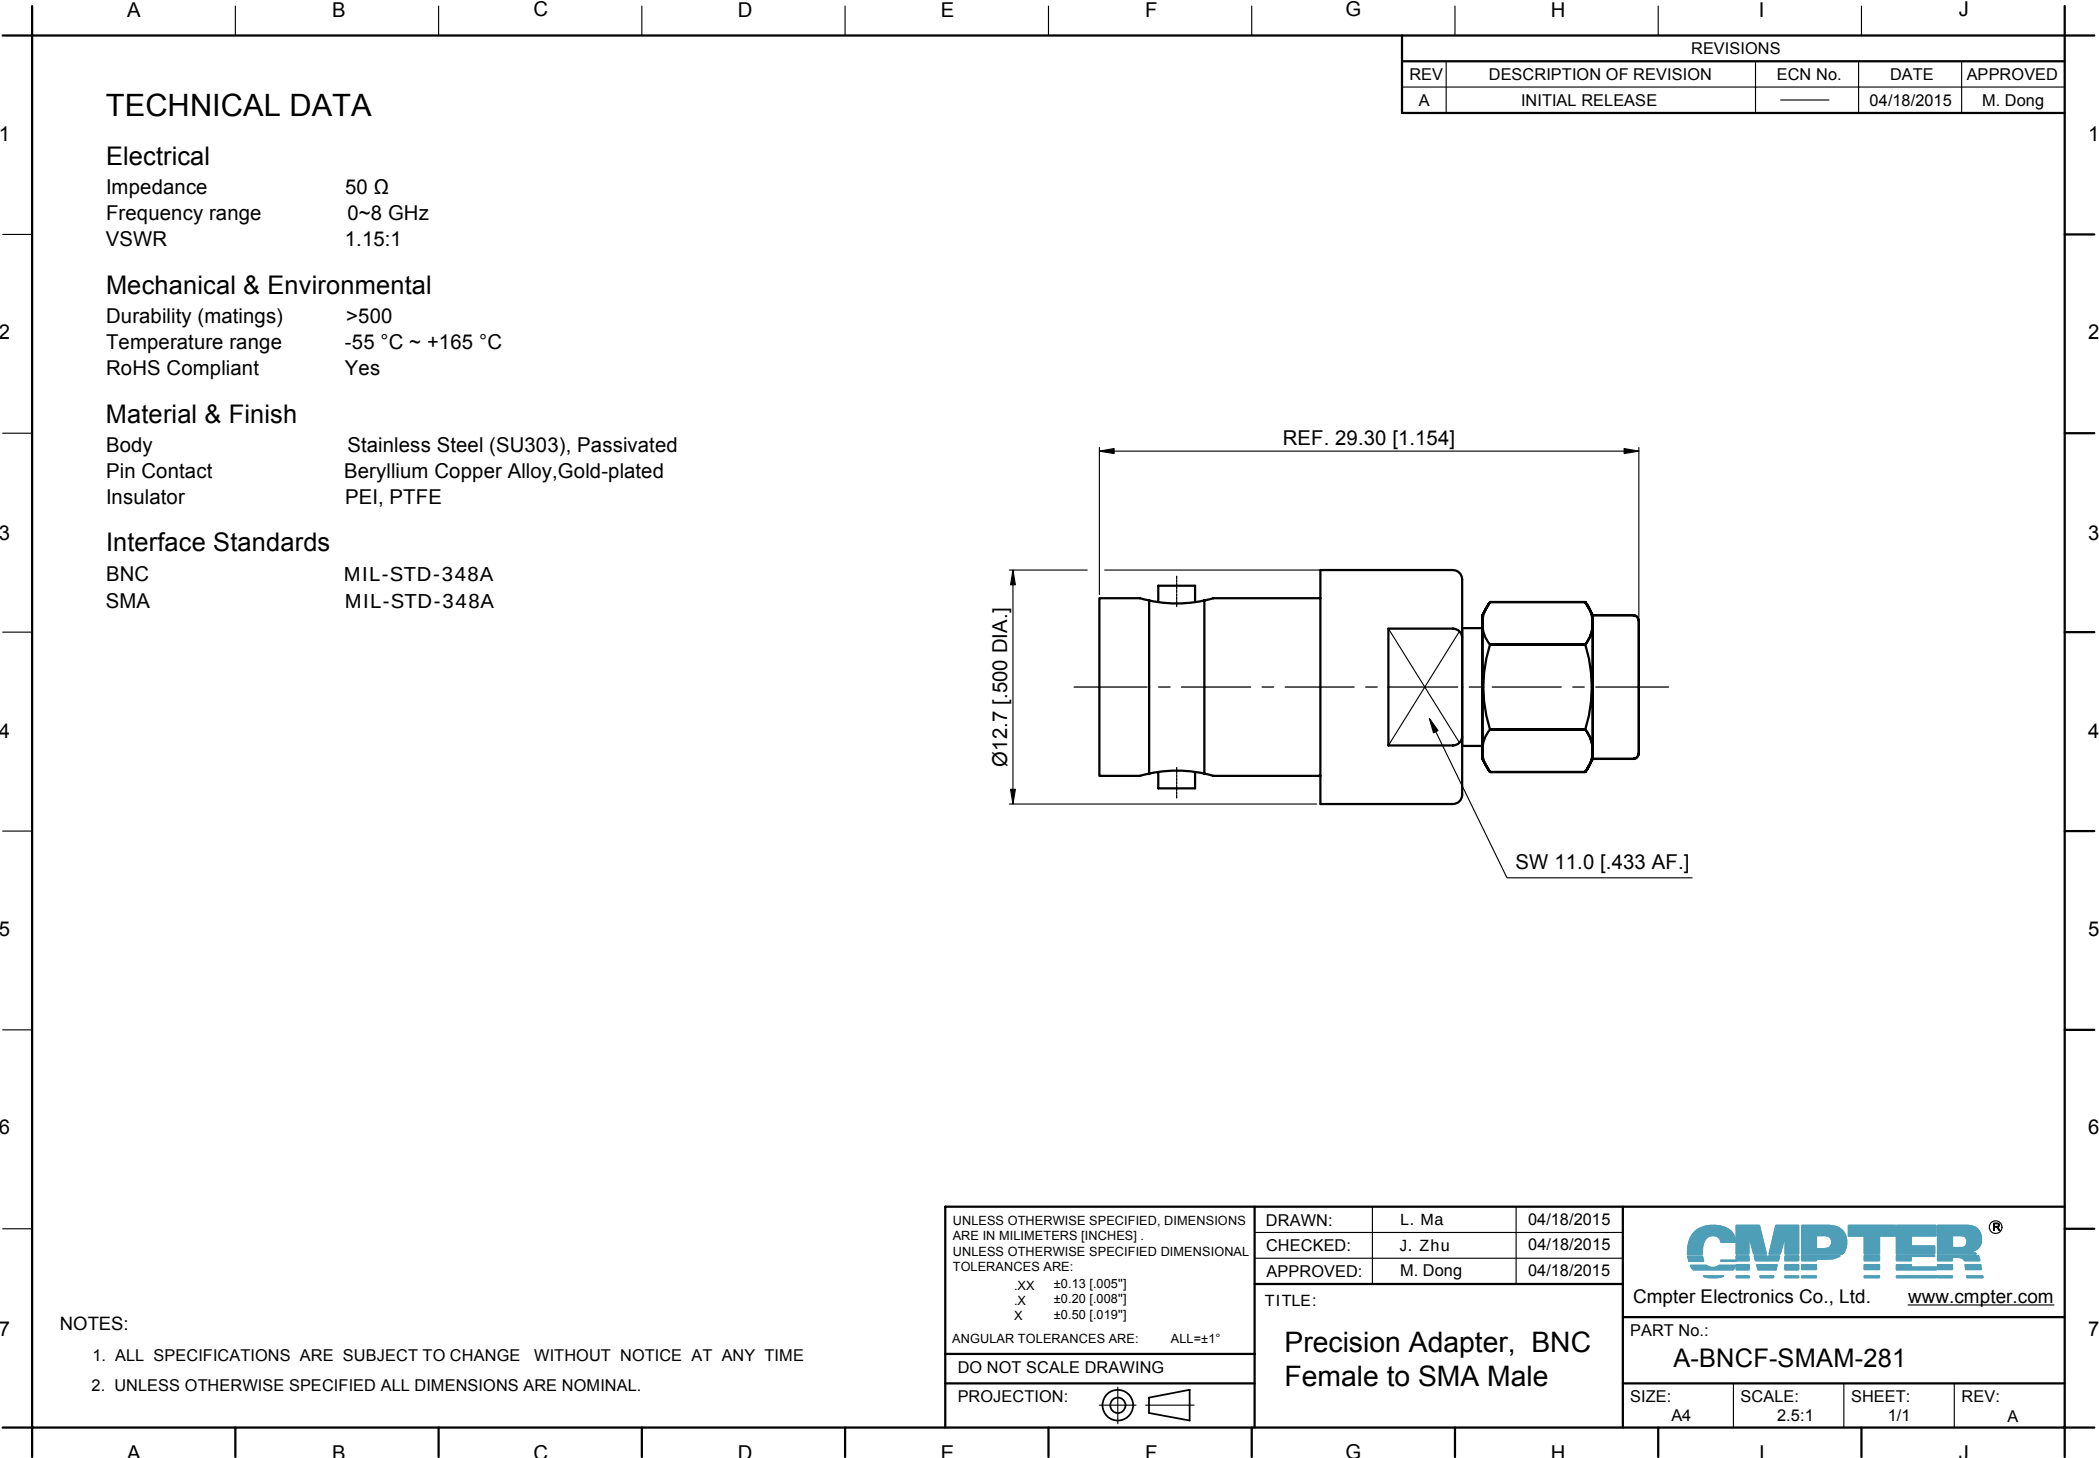

TECHNICAL DATA

Electrical

Impedance 50 Ω
Frequency range 0~8 GHz
VSWR 1.15:1

Mechanical & Environmental

Durability (matings) >500
Temperature range -55 °C ~ +165 °C
RoHS Compliant Yes


Material & Finish

Body Stainless Steel (SU303), Passivated
Pin Contact Beryllium Copper Alloy, Gold-plated
Insulator PEI, PTFE

Interface Standards

BNC MIL-STD-348A
SMA MIL-STD-348A

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE		04/18/2015	M. Dong

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL±1° DO NOT SCALE DRAWING PROJECTION: 	
--	--

DRAWN:	L. Ma	04/18/2015
CHECKED:	J. Zhu	04/18/2015
APPROVED:	M. Dong	04/18/2015

TITLE:
**Precision Adapter, BNC
Female to SMA Male**

 Cmpter Electronics Co., Ltd. www.cmpter.com			
PART No.: A-BNCF-SMAM-281			
SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: A

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.