

TECHNICAL DATA

Electrical

Impedance 50 Ω
Frequency range 0~6 GHz
Withstanding voltage 1000 V
Insulation resistance ≥5000MΩ

Mechanical & Environmental

Durability (matings) >500
Temperature range -65 °C ~ +165 °C
RoHS Compliant Yes


Material & Finish

Body Brass, Nickel-plated
Pin Contact Beryllium Copper Alloy, Gold-plated
Insulator PTFE

Interface Standards

TNC IEC-60169
SMA IEC-60169

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	03/16/2018	M. Dong

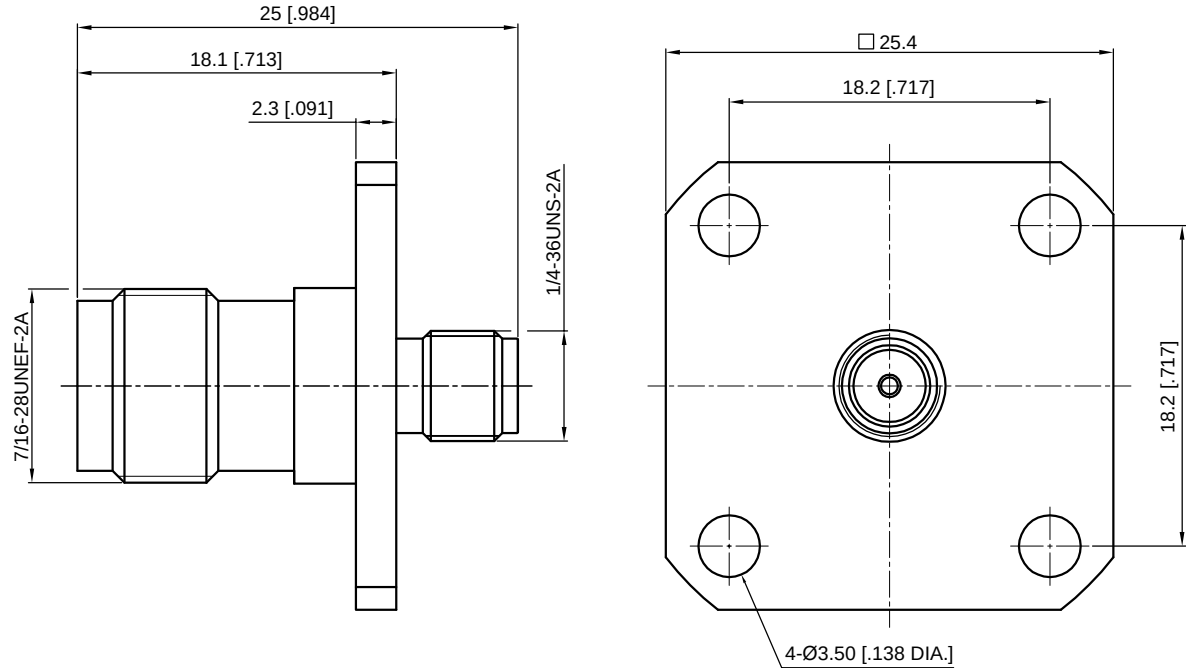

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [0.005"] X ±0.20 [0.008"] X ±0.50 [0.019"] ANGULAR TOLERANCES ARE: ALL= ±1°	
DO NOT SCALE DRAWING	
PROJECTION:	

DRAWN:	L. Ma	03/16/2018
CHECKED:	J. Zhu	03/16/2018
APPROVED:	M. Dong	03/16/2018

TITLE:
Adapter, TNC Female to
SMA Female, 4 Hole Flange

 Cmpter Electronics Co., Ltd. www.cmpter.com			
PART No.: A-TNCF-SMAF-333			
SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: A