

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
A	INITIAL RELEASE	—	L. Ma	06/16/10	06/16/10

TECHNICAL DATA

■ Electrical data

Impedance	50 Ω
Frequency range	0~11 GHz
VSWR	1.15:1

■ Mechanical data


Temperature range	-55 °C ~ +165 °C
Durability (matings)	>500

■ Material data

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI, PTFE



■ Interface Standards

TNC	MIL-STD-348A
SMA	MIL-STD-348A

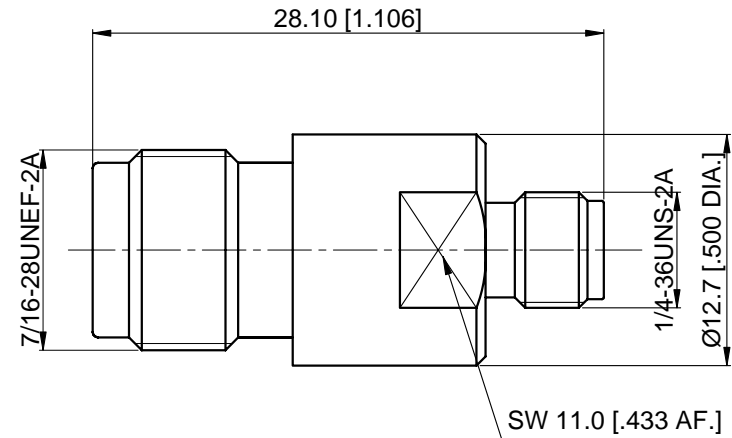

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 06/16/10 ENGINEER: J. Zhu 06/16/10 APPROVED: M. Dong 06/16/10 TOLERANCE UNLESS OTHERWISE SPECIFIED X ±0.50 [.019"] .X ±0.20 [.008"] .XX ±0.10 [.004"] ANGLES ±1°	TITLE: Precision Adapter, TNC Female to SMA Female	 www.cmppter.com
PART No.: P-TNCF-SMAF-168	DIMENSIONS IN MILLIMETERS (mm)	
SIZE: A4	SCALE: 2.5:1	SHEET: 1/1
REV: A		