

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~ 6 GHz
Withstanding voltage	1000 V
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-65 $^{\circ}\text{C}$ ~ +165 $^{\circ}\text{C}$
RoHS Compliant	Yes

Material & Finish


Body	Brass, Nickel-plated
Coupling Nut	Brass, Nickel-plated
Pin Contact	Brass, Gold-plated
Insulator	PTFE
Gasket	Silicone Rubber

Interface Standards

N	IEC-60169
TNC	IEC-60169

REVISIONS

REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	07/14/2007	M. Dong
B	DIMENSIONS CHANGED	—	11/25/2015	M. Dong

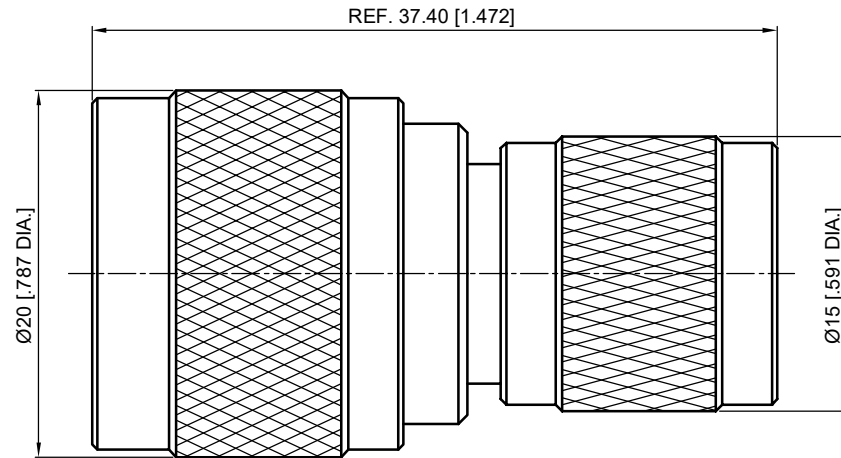

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	± 0.13 [.005"]
.X	± 0.20 [.008"]
X	± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL = $\pm 1^{\circ}$

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	11/25/2015
CHECKED:	J. Zhu	11/25/2015
APPROVED:	M. Dong	11/25/2015

TITLE:

Adapter, N Male to TNC
Male

CMPTER®

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:

A-NM-TNCM-026

SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: B
-------------	-----------------	---------------	-----------