

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~18 GHz
VSWR	1.25:1

Mechanical & Environmental


Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI, PTFE
Gasket	Silicone Rubber

Interface Standards

TNCA	MIL-STD-348A
------	--------------

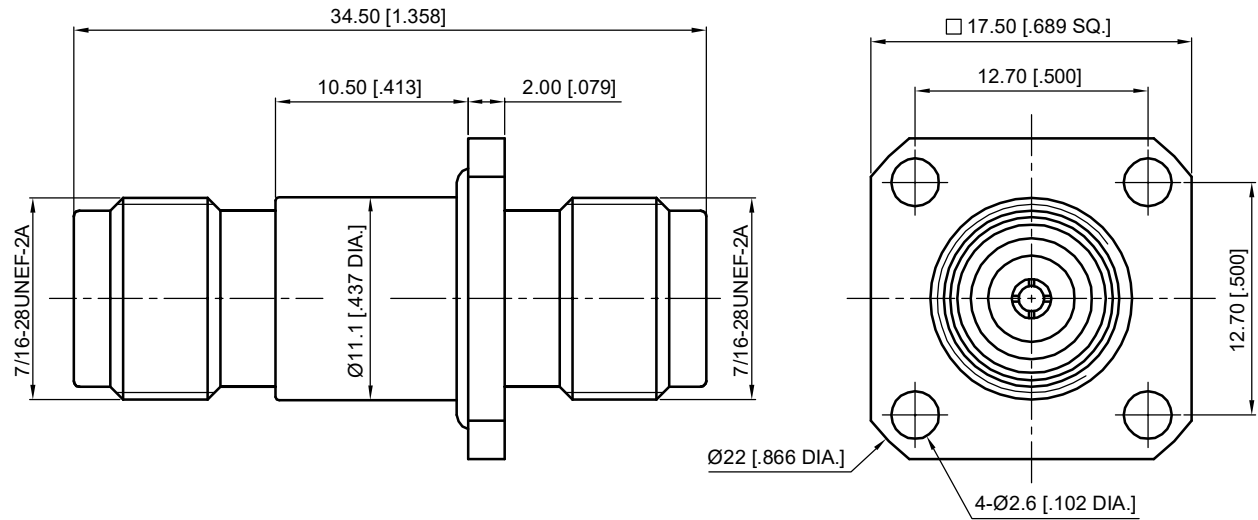

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	±0.13 [0.005"]
.X	±0.20 [0.008"]
X	±0.50 [0.019"]

ANGULAR TOLERANCES ARE: ALL = ±1°

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	07/04/2017
CHECKED:	J. Zhu	07/04/2017
APPROVED:	M. Dong	07/04/2017

TITLE:

Precision Adapter, TNCA
Female to TNCA Female,
4 Hole Flange

CMPPTER®

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:

P-TNCAF-TNCAF-301

SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: A
-------------	-----------------	---------------	-----------