

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~50 GHz
VSWR	1.15:1
Contact resistance	
-centre contact	$\leq 3\text{m}\Omega$
-outer contact	$\leq 2\text{m}\Omega$
Insulation resistance	$\geq 3000\text{M}\Omega$

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes


Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI , PTFE

Interface Standards

2.4mm	IEEE STD 287-2007
-------	-------------------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	08/12/2010	M. Dong
B	ADD TYPE A & B	—	10/18/2016	M. Dong

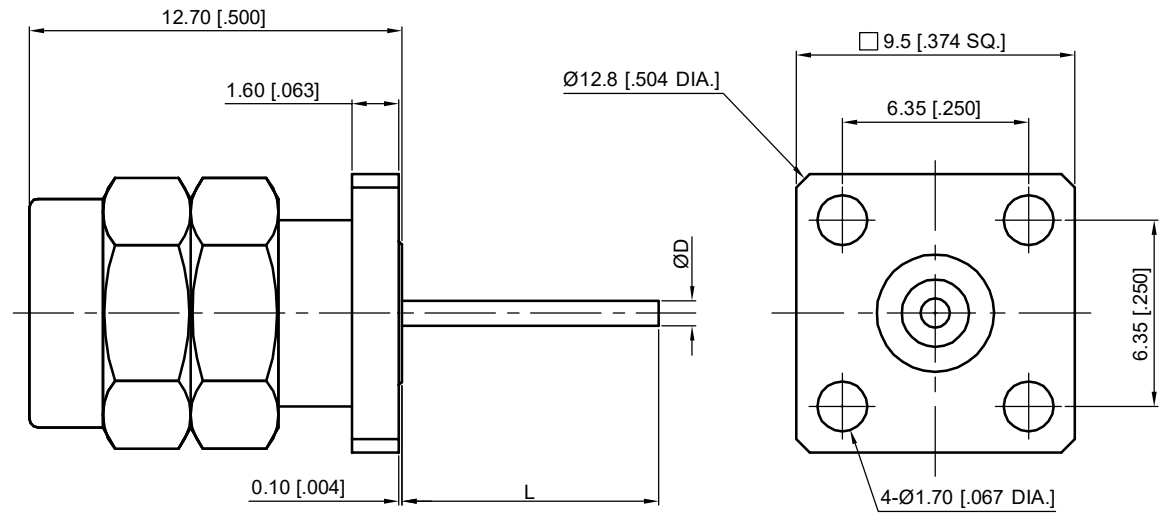

Part Number	D	L
97-03-9F2-029 A	0.86 [0.034]	8.75 [0.344]
97-03-9F2-029 B	0.64 [0.025]	10 [0.394]

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX ± 0.13 [0.005"]
.X ± 0.20 [0.008"]
X ± 0.50 [0.019"]

ANGULAR TOLERANCES ARE: ALL = $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	10/18/2016
CHECKED:	J. Zhu	10/18/2016
APPROVED:	M. Dong	10/18/2016

TITLE:

2.4mm Straight Male,
Air Line Through the Wall,
4 Hole Flange

CMPPTER®

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:

97-03-9F2-029

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: B
-------------	---------------	---------------	-----------