

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
A	INITIAL RELEASE	—	H. Xiao	07/22/10	07/22/10

TECHNICAL DATA

Electrical data

Impedance	50 Ω
Frequency range	0~40 GHz
VSWR	1.15:1
Contact resistance	
-centre contact	≤3mΩ
-outer contact	≤2mΩ
Insulation resistance	≥3000MΩ

Mechanical data


Temperature range	-55 °C ~ +165 °C
Durability (matings)	>500

Material data

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI, PTFE

Interface Standards



2.92mm	MIL-STD-348A
--------	--------------

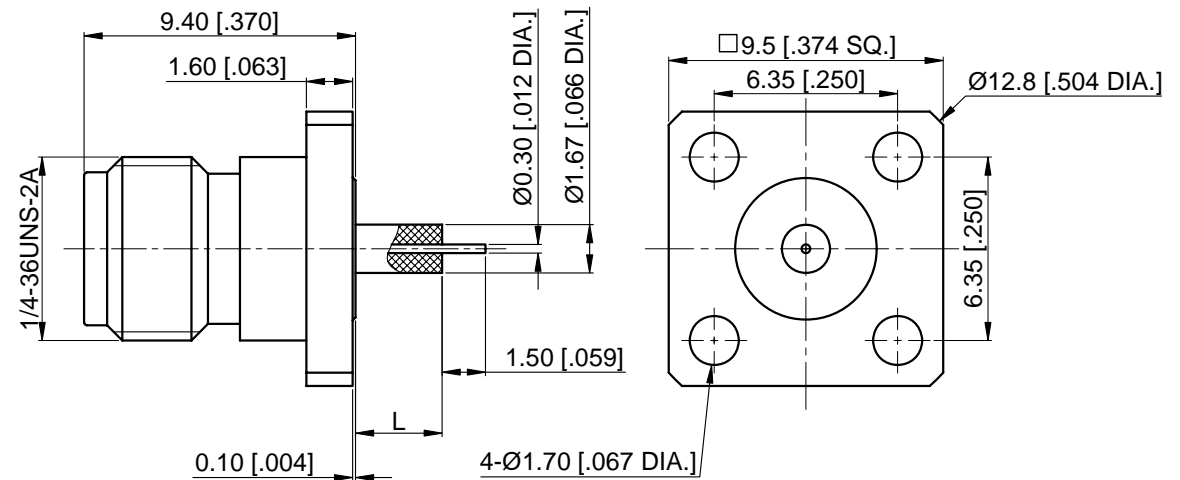

Part Number	L
96-02-9F7-020A	1.4 [0.055]
96-02-9F7-020B	3 [0.118]

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. Xiao 07/22/10	TITLE: 2.92mm Straight Female, Insulator Through the Wall, 4 Hole Flange	 www.cmppter.com			
ENGINEER: YF. Zhu 07/22/10					
APPROVED: M. Dong 07/22/10		 DIMENSIONS IN MILLIMETERS (mm)			
TOLERANCE UNLESS OTHERWISE SPECIFIED					
X ±0.50 [0.019"]	PART No.: 96-02-9F7-020	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
.X ±0.20 [0.008"]					
.XX ±0.10 [0.004"]					
ANGLES ±1°					